



# PINTURAS **DECOLOR**<sup>®</sup>

CATALOGUE 2023 ED.2  
ENG

[www.decolor.com](http://www.decolor.com)




<b>PRODUCT LINE 1. WATER BASED PAINTS.....</b>	<b>5</b>
LINE 1.1. EXCLUSIVE .....	6
LINE 1.2. PREMIUM RANGE .....	6
LINE 1.3. MEDIUM .....	8
LINE 1.4. INDUSTRIAL .....	9
LINE 1.5. SATIN .....	11
LINE 1.6. TEXTURED .....	12
LINE 1.7. COLOURS .....	13
<b>PRODUCT LINE 2. FACADES .....</b>	<b>15</b>
LINE 2.1. SMOOTH COATINGS .....	16
LINE 2.2. ROUGH COATINGS .....	18
LINE 2.3. PREMIUM RANGE .....	18
LINE 2.4. FACADE VARNISHES .....	20
<b>PRODUCT LINE 3. WATERPROOFING .....</b>	<b>21</b>
<b>PRODUCT LINE 4. METAL .....</b>	<b>24</b>
LINE 4.1. SOLVEN BASED ENAMELS .....	25
LINE 4.2. WATER BASED ENAMELS .....	28
LINE 4.3. SOLVEN BASED PRIMERS .....	30
LINE 4.4. WATER BASED PRIMERS .....	31
<b>PRODUCT LINE 5. WOOD .....</b>	<b>32</b>
LINE 5.1. PRIMERS .....	33
LINE 5.2. WATER BASED VARNISHES .....	34
LINE 5.3. SOLVEN BASED VARNISHES .....	36
LINE 5.4. WATER BASED LASUR .....	37
LINE 5.5. SOLVEN BASED LASUR .....	37
LINE 5.6. SOLVEN BASED ENAMELS .....	38
LINE 5.7. WATER BASED ENAMELS .....	39
<b>PRODUCT LINE 6. FLOORS AND SPORTS .....</b>	<b>40</b>
LINE 6.1. SOLVEN BASED COATINGS .....	41
LINE 6.2. WATER BASED COATINGS .....	42
LINE 6.3. SPORTS .....	43
LINE 6.4. SANITARY/FOOD USE FLOORS .....	44
LINE 6.5. PRIMERS .....	44
LINE 6.6. PUTTY .....	45
LINE 6.7. ADDITIVES .....	45
<b>PRODUCT LINE 7. HIGH DECORATION .....</b>	<b>46</b>
LINE 7.1. COSTA, DECORATIVE PAINTS .....	47
LINE 7.2. ACCESSORIES .....	48
<b>PRODUCT LINE 8. SURFACE PREPARATION .....</b>	<b>50</b>
LINE 8.1. SOLVENT BASED PRIMERS .....	51
LINE 8.2. WATER BASED FIXATIVES .....	51
LINE 8.3. PUTTY .....	54
<b>PRODUCT LINE 9. TINTING SYSTEM .....</b>	<b>56</b>
LINE 9.1. WATER BORNED BASES .....	57
LINE 9.2. SOLVET BORNED BASES.....	59
LINE 9.3. DYES.....	60
LINE 9.4. CHARTS OF COLOURS .....	61
<b>PRODUCT LINE 10. PRODUCTS FOR SPECIFIC USES .....</b>	<b>62</b>
LINE 10.1. SOLVENTS .....	63
LINE 10.2. DYES.....	63
LINE 10.3. ANTI-STAINS .....	64
LINE 10.4. CLEANERS .....	65
LINE 10.5. DISTEMPER .....	65











Our strategic mission is the manufacture and marketing of paints, coatings and special treatments for decoration, construction, industry and wood, as well as machinery and accessories for different markets, such as: small, medium and large commercial areas, specialised professionals, private customers, companies and institutions.

Our commitment is to offer the best quality in a wide range of products and services, in order to satisfy the customer's needs and meet the expectations entrusted to us.

DECOLOR is also committed to respect the environment and to strictly comply with the laws and regulations related to our activity. In this sense, our investment policy is directly oriented to R&D to make it unequivocally possible.



	Product with anti-fungi and anti-algae protection
	A+ rating on "Indoor air emissions".
	Water based product.
	2-component system
	Water vapour permeability. EN ISO 7783-2
	Transmission rate of liquid water. EN 1062-3
	Thermal Insulator.
	UV rays protection, UV rays filter.



# PRODUCT LINE 1. WATER BASED PAINTS



If you're looking for a water base paint , here you'll find it with the aesthetic concept of quality, touch, colour and warmth that connects with your personality. Quality remains.

## LINE 1.1. EXCLUSIVE

### ALBOR ACRYLIC AQUA



#### DESCRIPTION

Water-based enamel, produced from acrylic resins. Excellent finish and leveling.

Applications: Indoor and outdoor use. It is perfect for high decoration on all types of supports such as walls, doors, windows, furniture, etc.

Colours: WHITE

SIZES :

750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 6 - 8 hours
- **Thinner**: Water.
- **Coverage**: 12-14 m<sup>2</sup>/l per coat.



1 hour

INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### SUPREM - HEALTHY ENVIRONMENT



#### DESCRIPTION

Water-based matt paint that absorbs formaldehyde from indoor environments. The air is purified without releasing any toxic substances. Cleans the air we breathe.

Applications: for decoration of interior of homes, offices, schools, factories, kindergartens, etc

Colours: WHITE

SIZES :

4 l

14 l

Available certification

#### FEATURES

- **Recoatable** : 4-6 hours
- **Thinner**: Water.
- **Coverage**: 10-11 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### CERO-BACT - ANTIBACTERIAL PAINT



#### DESCRIPTION

Water-based matt paint with anti-bacterial action, containing silver ions and a preservative component to reduce the bacterial proliferation up to 99,99% on the paint film.

Applications: Sport facilities (swimming-pools and changing rooms), markets, hospitals, schools (nurseries, playgrounds), etc.

Colours: WHITE

SIZE :

4 l

14 l

Available certification  
Standard: JIS Z 2801

#### FEATURES

- **Recoatable** : 4-6 hours
- **Thinner**: Water.
- **Coverage**: 10-12 m<sup>2</sup>/l per coat.



1 hour

INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### DECO-AISLANT ANTI-CONDENSATION



#### DESCRIPTION

High-performance water-based paint for thermal insulation and anti-condensation. Provides significant energy savings in the interior of homes, public buildings, offices, etc. Avoids the formation of condensation droplets and prevents the formation of fungus and damp stains.

Colours: WHITE

SIZES :

750 ml

4 l



#### FEATURES

- **Recoatable**: 24 hours.
- **Thinner**: Water
- **Coverage**: 2-4 m<sup>2</sup>/l



1 hour

INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

# PRODUCT LINE 1. WATER BASED PAINTS

## LINE 1.2. PREMIUM RANGE

### MATE D-800



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality acrylic-polyurethane paint for the protection and decoration of interior and exterior ceilings and walls, with a deep matt finish of high quality and beautiful. It is ideal for painting exterior facades as it is breathable and waterproof.

Applications: Plaster ceilings and walls, cement walls, facades and general masonry surfaces.

Colours: WHITE

SIZES :

4 l

14 l

#### FEATURES

- **Recoat:** 4-6 hours.
- **Thinner:** Water
- **Coverage:** 8 m<sup>2</sup>/l



INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### MATE D-600



#### DESCRIPTION

Water-based deep-matt paint, 100% acrylic. Perfect leveling, very beautiful finish, anti-splash, high coverage. Extreme resistance to rubbing. With anti-fungi and anti-algae protection.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE

SIZES :

4 l

14 l

#### FEATURES

- **Recoat:** 4-6 hours.
- **Thinner:** Water
- **Coverage:** 10-14 m<sup>2</sup>/l per coat.



INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### MATT MONT BLANC



#### DESCRIPTION

Water-based matt paint, 100% acrylic. Perfect leveling, beautiful finish. High coverage. High resistance to rubbing.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE

SIZES :

4 l

14 l

#### FEATURES

- **Recoat:** 4-6 hours.
- **Thinner:** Water
- **Coverage:** 10-14 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### DELUXE - ECOLOGICAL PAINT



#### DESCRIPTION

Ecological matt paint for decoration and protection of internal ceilings and walls when the best quality and beauty are required. Odorless. High performance. No dripping or splashing.

Applications: Decoration of interior environments in homes, offices...

Colours: WHITE and Chart of Colours DELUXE

SIZES :

4 l

14 l

#### FEATURES

- **Recoat:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 8 m<sup>2</sup>/l



INDOOR

Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

EU Ecolabel :  
ES08/0044/0013

# PRODUCT LINE 1. WATER BASED PAINTS

## MATT ANTI-INSECTS



### DESCRIPTION

High quality matt paint with anti-insect action. Flies, mosquitoes, bees, spiders, ants... die by contact with this paint. Suitable for decoration and protection of interior surfaces.

"This product cannot be sold within of the European Union. It must be destined to be exported out of EU"

Applications: Decoration of interior environments in homes, offices...

Colours: WHITE

SIZES :

4 l

14 l

### FEATURES

- **Recoatable:** 4-6 hours
- **Thinner :** Water
- **Coverage:** 11-15 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## LINE 1.3. MEDIUM

## MATT SPECIAL PLUS



### DESCRIPTION

High quality deep-matt paint. Perfect leveling. Quality finish. High performance and high rubbing resistance.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES :

750 ml

4 l

14 l

### FEATURES

- **Recoatable :** 4-6 hours.
- **Thinner :** Water
- **Coverage:** 11-15 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

## ORION



### DESCRIPTION

Matt paint specially indicated for plasterboard supports. High quality deep-matt finish. Perfect leveling and high performance.

Applications: Plaster ceilings and walls, plasterboards, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES :

4 l

14 l

### FEATURES

- **Recoatable :** 4-6 hours.
- **Thinner :** Water
- **Coverage:** 8-12 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## NIGER



### DESCRIPTION

Matt paint formulated from 100% acrylic specially indicated for the decoration and protection of all types of building supports, particularly on irregular surfaces such as droplets, lime, old paints, etc. Great water resistance.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES :

4 l

14 l

### FEATURES

- **Recoatable :** 4-6 hours.
- **Thinner :** Water
- **Coverage:** 8-12 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## PRODUCT LINE 1. WATER BASED PAINTS

### MATE EXTRA



Available: Tinting System  
DECOLOR

#### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces. Easy to apply, no splashing.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES : 

750 ml	4 l	9 l	14 l
--------	-----	-----	------

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner** : Water
- **Coverage**: 8-10 m<sup>2</sup>/l per coat.



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

### MATE 6



#### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES : 

3 l	12 l
-----	------

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner** : Water
- **Coverage**: 7-9 m<sup>2</sup>/l per coat.



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## LINE 1.4. INDUSTRIAL MATT PAINTS

### STELLA



#### DESCRIPTION

High quality matt paint for decoration and protection of interior and exterior surfaces. Finish without reflections or roller marks. Exceptional whiteness, indicated where greater luminosity is required.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES : 

4 l	14 l
-----	------

#### FEATURES

- **Recoatable**: 4-6 hours.
- **Thinner**: Water.
- **Coverage**:  
7 m<sup>2</sup>/l - Class 2 UNE-EN 13300



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300



# PRODUCT LINE 1. WATER BASED PAINTS

## MATT MAXI-COVERING



### DESCRIPTION

High covering matt paint for the decoration and protection of all kind of building supports.

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES :

4 l

14 l

### APPLICATION

- **Recoatable** : 4-6 hours.
- **Thinner** : Water
- **Coverage**: 8-12 m<sup>2</sup>/l per coat.



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## MATT D-300 ANTI-FUNGI



### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces. It contains a film preservative which provides an excellent protection against a wide spectrum of fungi and algae

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES :

750 ml

4 l

14 l

### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner** : Water
- **Coverage**: 8-11 m<sup>2</sup>/l per coat.



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## INDUSTRIAL MATT ANTI-FUNGI



### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces. It contains a film preservative which provides an excellent protection against a wide spectrum of fungi and algae

Applications: Plaster ceilings and walls, cement walls and general masonry surfaces.

Colours: WHITE.

SIZES :

4 l

9 l

14 l

### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner** : Water
- **Coverage**: 8-10 m<sup>2</sup>/l per coat.



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## MATT DECORATION



### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces.

Applications: Plaster ceilings and walls, cement walls and masonry in general.

Colours: WHITE

SIZES :

4 l

14 l

### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner** : Water
- **Coverage**: 6-8 m<sup>2</sup>/l per coat.



Wet abrasion resistance:  
CLASS 4 as per UNE-EN 13300

## PRODUCT LINE 1. WATER BASED PAINTS

### MATT BILBAO



#### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces.

Applications: Plaster ceilings and walls, cement walls and masonry in general.

Colours: WHITE

SIZES :

4 l

14 l

#### FEATURES

- **Repeint:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 6-8 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 4 as per UNE-EN 13300

### MATT CARIBE



#### DESCRIPTION

Matt paint specially indicated for the decoration and protection of all kind of building surfaces.

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE

SIZES :

3.5 l

12 l

#### FEATURES

- **Repeint:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 6-8 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 4 as per UNE-EN 13300

## LINE 1.5. SATIN PAINTS

### SPECIAL SATIN



#### DESCRIPTION

Satin paint specially indicated for the decoration and protection of all kind of building surfaces

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE

SIZES :

4 l

9 l

15 l

#### FEATURES

- **Gloss:** 60° 25-30 GU  
UNE-EN ISO 2813
- **Repeint:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 12-15 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### SATIN MONTREAL



#### DESCRIPTION

Satin paint specially indicated for the decoration and protection of all kind of building surfaces

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE

SIZES :

750 ml

4 l

9 l

15 l

#### FEATURES

- **Gloss:** 60° 5-10 GU  
UNE-EN ISO 2813
- **Repeint:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 12-15 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

## PRODUCT LINE 1. WATER BASED PAINTS

### ● SEDA



#### DESCRIPTION

Satin paint specially indicated for the decoration and protection of all kind of building surfaces

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE

SIZES : 4 l 15 l

#### FEATURES

- **Gloss:** 60° 2,5-3,5 GU  
UNE-EN ISO 2813
- **Recoatable:** 4- 6 hours.
- **Thinner:** Water.
- **Coverage:** 9-12 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### ● MEDITERRANEO SATIN



#### DESCRIPTION

Satin paint specially indicated for the decoration and protection of all kind of building surfaces

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE

SIZE : 15 l

#### FEATURES

- **Gloss:** 60° 20-25 GU  
UNE-EN ISO 2813
- **Recoatable:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 12-15 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300

### ● CARIBE SATIN



#### DESCRIPTION

Satin paint specially indicated for the decoration and protection of all kind of building surfaces

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE

SIZES : 3,5 l 12 l

#### FEATURES

- **Gloss:** 60° 5-15 GU  
UNE-EN ISO 2813
- **Recoatable:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 12-15 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300

## LINE 1.6. TEXTURED PAINTS

### ● GOTAPLAST (for relief effects)



#### DESCRIPTION

High quality matt paste paint to decorate and finish with relief effects or "gotele".

Applications: vertical walls of plaster walls, cement plastered walls and general masonry surfaces.

SIZE : 14 l

#### FEATURES

- **Primer :** MATE EXTRA.
- **Recoatable:** 4-6 hours
- **Thinner:** Water.
- **Coverage:** 2-5 m<sup>2</sup>/l



1 hour

## I LINE 1.7. COLOURS

### DELUXE



**EU Ecolabel :**  
**ES08/0044/0013**

#### DESCRIPTION

High quality monocoat matt paint formulated from state-of-the-art resins, specially indicated when a delicate finish is required. Durable and beautiful. Odourless

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: WHITE and Chart of Colours DELIXE

SIZES :

4 l

14 l

#### FEATURES

- **Recoatable:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 8 m<sup>2</sup>/l.



**Wet abrasion resistance:**  
**CLASS 2 as per UNE-EN 13300**

### EKUS



#### DESCRIPTION

Matt paint with concentrated colours for the decoration and protection of all kind of building surfaces. Specially suitable for colour gradients.

Applications: Plaster ceilings and walls, cement walls and masonry in general

SIZES :

750 ml

4 l

15 l

#### FEATURES

- **Recoatable:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 11-15 m<sup>2</sup>/l per coat



**Wet abrasion resistance:**  
**CLASS 1 as per UNE-EN 13300**

### BLACK MATT



#### DESCRIPTION

Black matt paint specially indicated for the decoration and protection of all kind of building surfaces

Applications: Plaster ceilings and walls, cement walls and masonry in general

Colours: BLACK

SIZES :

4 l

14 l

#### FEATURES

- **Recoatable:** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 8-12 m<sup>2</sup>/l per coat




**Wet abrasion resistance:**  
**CLASS 2 as per UNE-EN 13300**

## LINE 1.7. COLOURS

### ● Chart of Colours DELUXE



### ● Chart of Colours EKUS

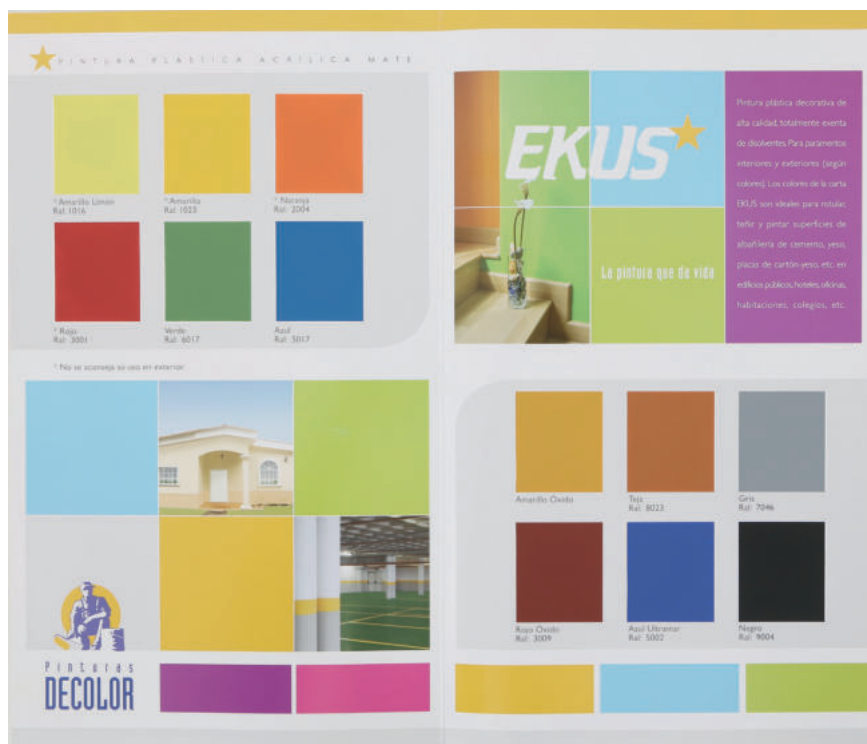



# PRODUCT LINE 2. FACADES



Facades are the window to the soul of towns and villages. They show their likes, ambitions, lifestyle, traditions, history, economy and culture.



## LINE 2.1. SMOOTH COATINGS

### IMPER-ELAST PLUS



#### DESCRIPTION

Elastic waterproofing coating acrylic for the protection and waterproof of vertical exterior surfaces.

- Barrier against the CO<sub>2</sub>, protecting the concrete from the carbonation.
- Weather and UV sun light resistant.
- Perfect elongation and traction resistance.
- Waterproofing and breathable.

Product with protection against fungi and algae.

Applications: Plaster, concrete, brick, etc.

Colours: WHITE.

SIZES :

15 l

#### FEATURES

- Recoatable : 12 - 24 hours.
- Thinner: Water.
- Coverage: 3 - 4 m<sup>2</sup>/l



Available Product Certificate.  
Warranty 10 Years.



### IMPER-ELAST SMOOTH



Available: Tinting System  
DECOLOR

#### DESCRIPTION

Waterproof smooth elastic coating for the protection and waterproofing of vertical exterior walls. Formulated from 100% acrylic copolymers. Curable by UV rays.

Product with protection against fungi and algae.

Applications: Plaster, concrete, brick, etc.

Colours: WHITE and Chart of Colours DECORTX/IMPER-ELAST.

SIZES :

4 l

15 l

#### FEATURES

- Recoatable : 12 - 24 hours.
- Thinner: Water.
- Coverage: 2 - 3 m<sup>2</sup>/l



Available Product Certificate.  
Warranty 10 Years.



### DECORTX SMOOTH PREMIUM SILOX



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality smooth coating with polysiloxanes for the protection and decoration of all kinds of concrete surfaces, exterior masonry, restoration of single-layer mortar facades, etc. Water-vapour permeable. Water-resistant and waterproof.

Product with protection against fungi and algae.

Colours: WHITE and Chart of Colours DECORTX/IMPER-ELAST.


SIZES :

4 l

14 l

#### FEATURES

- Recoatable : 4-6 hours.
- Thinner: Water.
- Coverage: 8-10 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 8 Years.

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300



## PRODUCT LINE 2. FACADES

### ● DECORTEX SMOOTH PREMIUM



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality smooth coating formulated from 100% acrylic copolymers for the protection and decoration for vertical exterior walls.

Product with protection against fungi and algae.

Applications: Plaster, concrete, brick, etc.

Colours: WHITE and Chart of Colours DECORTEX/IMPER-ELAST.

SIZES :

4 l

14 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 7 Years.

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300



CLASS 2



CLASS 2

### ● SMOOTH COATING FOR FACADES



#### DESCRIPTION

Smooth coating for the protection and decoration for vertical exterior walls. Excellent covering properties.

Applications: plaster, concrete, brick, etc.

Colours: WHITE

SIZES :

4 l

14 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 7-9 m<sup>2</sup>/l per coat



Wet abrasion resistance:  
CLASS 2 as per UNE-EN 13300



CLASS 2



CLASS 2

## I LINE 2.2. ROUGH COATING

### ● DECORTEX ROUGH PREMIUM



#### DESCRIPTION

High quality acrylic rough coating, strong, for protection and decoration of exterior vertical walls.

Product with protection against fungi and algae.

Applications: Plaster, concrete, brick, etc.

Colours: WHITE and Chart of Colours DECORTEX/IMPER-ELAST.

SIZE :

14 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 1-2 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 7 Years.



CLASS 2



CLASS 2

## LINE 2.3. FACADES PREMIUM

### COATING AERO



Thermal insulation

#### DESCRIPTION

Mineral appearance coating for the decoration and protection of all kinds of exterior masonry surfaces. Suitable for application as a thin coat paint or as a thick coating capable of filling micro-cracks in the substrate, levelling surface imperfections and restoring single coat mortars on facades. Prevents fungal and algae growth and surface tensions. Maintains the appearance of the surface by providing durability, dirt repellency, water repellency, weather resistance, thermal insulation and durable colours with sunlight resistance.

Product with protection against fungi and algae.

Colours: WHITE and minimum order per colour chart of colours DECORTEX/IMPER-ELAST.

SIZE :

4 l

14 l

#### FEATURES

- **Recoatable:** 12-24 hours.
- **Thinner:** Water.
- **Coverage:**  
Thin coat: 7 m<sup>2</sup>/l and coat.  
Thick coat: 3 m<sup>2</sup>/l and coat.



2-4 hours

INDOOR / OUTDOOR

Available Product Certificate.  
Warranty 10 Years.



CLASS 3



CLASS 2

### CLIMAT



Available: Tinting System  
DECOLOR

#### DESCRIPTION

Acrylic smooth coating for decoration and protection of all kinds of exterior masonry surfaces. High hydrophobicity in early rain application together with excellent open time in warm climates.

Product with protection against fungi and algae.

Applications: Masonry in general, indoor and outdoor.

Colours: WHITE and Chart of Colours DECORTEX/IMPER-ELAST.

SIZES :

4 l

14 l

#### FEATURES

- **Recoatable :** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 8-10 m<sup>2</sup>/l



1 hour

Available Product Certificate.  
Warranty 10 Years.

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300



CLASS 3



CLASS 1

### DECO - QUARTZ



#### DESCRIPTION

Quartz-like monocoat decorative plaste with quartz appearance for protection and decoration . Suitable for create outdoor mosaics, for basements and waterproof of facades.

Applications: Masonry in general, indoor and outdoor.

Colours: Chart of Colours DECO-QUARTZ

Minimum order 300 kg. per colour.

SIZE :

20 kg. + 5 kg.  
(A+B)

#### FEATURES

- **Recoatable:** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 3-5 kg/m<sup>2</sup>



2-4 hours

INDOOR / OUTDOOR

Available Product Certificate.  
Warranty 8 Years.



CLASS 2



CLASS 2

## PRODUCT LINE 2. FACADES

### DECO-LITE HYDRO



Hydro Pliolite resin

#### DESCRIPTION

Smooth coating based on Hydro Pliolite resins, for the decoration and protection of all kind of building surfaces. High capacity of penetration on the substrate. It combines high impermeability with vapour permeability which allows for excellent waterproof protection with long durability.

Product with protection against fungi and algae.

Colours: WHITE

SIZES : 4 l 14 l

#### FEATURES

- Recoatable : 4-6 hours.
- Thinner: Water.
- Coverage: 8-10 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 10 Years.  
Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300



CLASS 3 CLASS 1

### DECO - AISLANT



Thermal insulation

#### DESCRIPTION

THERMAL INSULATION and ANTI-CONDENSATION Water-based paint for vertical and horizontal surfaces. It allows significant energy savings in industrial buildings, houses, offices, etc... when used.

Product with protection against fungi and algae.

Colours: WHITE

SIZES : 4 l 15 l

#### FEATURES

- Recoatable : 12-24 hours.
- Thinner: Water.
- Coverage: 0,2-0,6 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 10 Years.



CLASS 3 CLASS 2

### DECO-SIL



Available: Tinting System  
DECOLOR

#### DESCRIPTION

SILOXANE-based smooth coating for the decoration and protection of all kind of building surfaces. It combines high impermeability with vapour permeability. Its properties prevent dust and dirt from adhering to its surface: Anti-dust and Auto-cleaning

Product with protection against fungi and algae.

Colours: WHITE and Chart of Colours  
DECORTEX/IMPER-ELAST.

SIZES : 4 l 14 l

#### FEATURES

- Recoatable : 4-6 hours.
- Thinner: Water.
- Coverage: 7-10 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 10 Years.  
Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300



CLASS 3 CLASS 1

### ANTI-CARBONATION COATING



#### DESCRIPTION

High quality smooth coating specially suitable for protection and decoration of cement surfaces. Its anti-carbonation formula prevent the cement from crystallising and losing its pH level.

Product with protection against fungi and algae.

Colours: WHITE and Chart of Colours  
DECORTEX/IMPER-ELAST.

SIZES : 4 l 14 l

#### FEATURES

- Recoatable : 4-6 hours.
- Thinner: Water.
- Coverage: 8-10 m<sup>2</sup>/l per coat



Available Product Certificate.  
Warranty 7 Years.

Wet abrasion resistance:  
CLASS 1 as per UNE-EN 13300



CLASS 3 CLASS 1



## LINE 2.4. FACADE VARNISHES

### ● ANTI-GRAFFITI VARNISH AQUA



#### DESCRIPTION

Anti-adherence varnish for facades specially formulated to facilitate the removal of graffiti, dust and dirt from the walls.

SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable** : 20 minutes.
- **Thinner**: Water



### ● ACRYLIC VARNISH LC



#### DESCRIPTION

Acrylic varnish for protection of facades with high abrasion resistance that prevents erosion and extends the life of surface. Good adhesion and durability.

Applications: cement, concrete, brick, stone, etc...

SIZES :

1 l

5 l

20 l

#### FEATURES

- **Recoatable** : 24 hours.
- **Thinner**: Acrylic
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



**Gloss Finish**

### ● ACRYLIC VARNISH LC AQUA



#### DESCRIPTION

Acrylic varnish for protection of facades with high abrasion resistance that prevents erosion and extends the life of surface. Good adhesion and durability. Resistance to chemicals and weathering.

Applications: cement, concrete, brick, stone, etc...

SIZES :


750 ml

4 l

15 l

#### FEATURES

- **Recoatable**: 6-8 hours.
- **Thinner**: Water
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



**Gloss Finish**

### ● DECOKRIL WATERPROOFING W



#### DESCRIPTION

Colourless, water-based liquid for long-lasting water protection of facades. Does not change the appearance of the facade

Applications: cement, concrete, brick, stone, etc... indoor and outdoor.

SIZES :

750 ml

5 l

10 l

#### FEATURES

- **Recoatable** : 3-4 hours.
- **Thinner**: Water.
- **Coverage**: 6-8 m<sup>2</sup>/l per coat



# PRODUCT LINE 3. WATERPROOFING



# PRODUCT LINE 3. WATERPROOFING

## LINE 3. WATERPROOFING



### MEMBRANE - PUR 3G



Waterproof

#### DESCRIPTION

One-component elastic polyurethane membrane for protection and waterproof of terraces, roofs, floors, etc. Perfect adherence and high penetration capacity. To obtain walkable terraces.

Applications: Terraces, roofs, floors, etc.

Colours: COLOURLESS, WHITE, RED and GREY.

Elongation until rupture: 400% UNE 53413

SIZES :

4 l

15 l

#### FEATURES

- **Recoat:** 12-24 hours.
- **Thinner:** Water
- **Coverage:** 1,5-2 m<sup>2</sup>/l



2-4 hours

Available Product Certificate.  
Warranty 10 Years.

### DECOELAST



Waterproof

#### DESCRIPTION

High quality elastic waterproof coating for protection and waterproof of horizontal outdoor surfaces. Perfect adherence and high penetration capacity. To obtain walkable terraces. Curable by UV rays.

Applications: Terrace and roofs.

Colours: WHITE, RED, GREY, TILE RED, BLACK, GREEN and COLOURLESS.

Elongation until rupture: 430% UNE 53413

SIZES :

750 ml

4 l

15 l

#### FEATURES

- **Recoat:** 24 hours.
- **Thinner:** Water
- **Coverage:** 1,5-2 m<sup>2</sup>/l



2-4 hours

Available Product Certificate.  
Warranty 8 Years.

### DECO-STOP Antigoteras - FIBRE



Waterproof

#### DESCRIPTION

Fibreglass-reinforced waterproofing coating for the protection of horizontal and vertical surfaces such as terraces, roofs, façades, etc.

Applications: Terraces, roofs and facades.

Colours: RED.

Elongation until rupture: 100% UNE 53413

SIZES :

4 l

15 l

#### FEATURES

- **Recoat:** 24 hours.
- **Thinner:** Water
- **Coverage:** 1,5-2 m<sup>2</sup>/l.



2-4 hours

Available Product Certificate.  
Warranty 5 Years.

### DECO-STOP Antigoteras



Waterproof

#### DESCRIPTION

High quality elastic waterproofing coating for the protection of horizontal and vertical outdoor surfaces.

Applications: Terraces, roofs and facades.

Colours: WHITE, RED, GREY and GREEN.

Elongation until rupture: >100% UNE 53413

SIZES :

4 l

15 l

#### FEATURES

- **Recoat:** 24 hours.
- **Thinner:** Water
- **Coverage:** 1,5-2 m<sup>2</sup>/l.



2-4 hours

Available Product Certificate.  
Warranty 5 Years.

## PRODUCT LINE 3. WATERPROOFING

### ● DECO-STOP Roofs



Waterproof

#### DESCRIPTION

High-quality elastic waterproofing for the protection of horizontal and vertical outdoor surfaces.

Applications: Terraces and roofs.

Colours: WHITE and RED.

Elongation until rupture: 120% UNE 53413

SIZES :

4 l

14 l

#### FEATURES

- **Repeint:** 24 hours.
- **Thinner:** Water.
- **Coverage:** 1,5-2 m<sup>2</sup>/l.



### ● DECOKRIL FLEX



Waterproof

#### DESCRIPTION

DECOKRIL FLEX is a two-component waterproofing mortar, ideal for highly flexible cementitious waterproofing works. In addition to exceptional protection, it is able to bridge small cracks through a variety of cementitious substrates.

Colour: WHITE.

Elongation until rupture: 450% UNE 53413

SIZE :

5 l

20 l

SACS:

15 Kg

#### FEATURES

- **Repeint:** 24 hours.
- **Thinner:** Water.
- **Coverage:**  
In bonding layer: 0,120 l/m<sup>2</sup>.  
In mortar (A+B) 50:50 – 2,3 Kg/m<sup>2</sup> and 1 mm thick.  
In mortar (A+B) 60:40 – 2,2 Kg/m<sup>2</sup> and 1 mm thick.



### ● DECO-ROOF TILES



#### DESCRIPTION

Acrylic paint with high weather resistance, specially developed for the protection and decoration of tiles and cement substrates outdoors. Improves the final appearance, prevents the appearance of efflorescence and provides waterproofing.

Colours: OXIDE RED (RAL 3009), ANTHRACITE GRAY (RAL 7016), BROWN (RAL 8016), TILE (RAL 8023), BLACK (RAL 9005).

SIZES :

4 l

15 l

#### FEATURES

- **Repeint:** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 4-5 m<sup>2</sup>/l.



### ● CAPILLARITY STOP



#### DESCRIPTION

Liquid microemulsion to stop the ascending of humidity into the walls by creating a barrier that blocks capillarity.

SIZE :

1 l

#### FEATURES

- **Dilution:** Ratio 1:9 with water.

### ● CAPILLARITYSEAL - 600



#### DESCRIPTION

Silane-based cream gel with silane that creates a chemical barrier against the ascending of humidity into the walls. Its concentrated formula is indicated for stone, brick, aggregate and concrete walls. Applied with an injection gun.

SIZE :

600 ml



# PRODUCT LINE 4. METAL



Paint and protect. Much more than brightness or colour, enamels protect doors, windows, furniture, structures....



## LINE 4.1. SOLVENT BASED ENAMELS

### POLYURETHANE ENAMEL- 2 COMPONENTS (A+B)



#### DESCRIPTION

Two-component solvent-based aliphatic polyurethane enamel, catalysed with aliphatic polyisocyanate, for the protection of metallic structures on iron, steel, galvanised steel, aluminum ..., for concrete and cement floors, woods, polyester swimming-pools. High mechanical and chemical resistance.

Colours: WHITE and COLOURLESS.



Pot life: 4 hours

SIZES :

Comp. A 4 kg.

Comp. B 1 kg.

Comp. A 12 kg.

Comp. B 3 kg.

#### FEATURES

- **Mixture:** (A+B) 4:1 weight ratio.
- **Recoat:** 4-6 hours.
- **Thinner:** Acrylic.
- **Coverage:** 8-9 m<sup>2</sup>/kg. per coat



INDOOR / OUTDOOR

**Gloss Finish**

### ALBOR GLOSS ANTI-RUST



#### DESCRIPTION

High quality glossy enamel from alkyd resins with polyurethane and corrosion inhibitor.

ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )  
Certified with Fire Reaction Certificate.

Colours: WHITE and Chart of Colours ALBOR.

Available: Tinting System  
DECOLOR

\* BLACK & WHITE

SIZES :

250 ml

750 ml

2,5 l \*

4 l

#### FEATURES

- **Recoat:** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Gloss Finish**

### ALBOR SATIN ANTI-RUST



#### DESCRIPTION

High quality satin enamel from alkyd resins with polyurethane and corrosion inhibitor.

ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )  
Certified with Fire Reaction Certificate.

Colours: WHITE and BLACK.

Available: Tinting System  
DECOLOR

SIZES :

250 ml

750 ml

2,5 l

4 l

#### FEATURES

- **Recoat:** 12-24 hours
- **Thinner:** Synthetic and oil.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Satin Finish**

## ● ALBOR MATT ANTI-RUST



Available: Tinting System  
DECOLOR

### DESCRIPTION

High quality matt enamel from alkyd resins with polyurethane and corrosion inhibitor.

ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )  
Certified with Fire Reaction Certificate.

Colours: WHITE and BLACK.

SIZES :

250 ml

750 ml

2,5 l

4 l

### FEATURES

- **Recoatable** : 12-24 hours.
- **Thinner**: Synthetic and oil
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



4-5 hours

INDOOR / OUTDOOR

**Matt finish**

### Colores / Colours / Couleurs

BLANCO REF : 100



ROJO  
VIVO 325



ROJO  
INGLES 331



ROJO  
INTENSO 336




ROJO  
CARRUAJES 340



AMARILLO  
CANARIO 309



AMARILLO  
CROMO 316



NARANJA  
318



OCRE  
TOSTADO 349



MARFIL  
319



CREMA  
320



BEIGE  
344



SIENA  
350



MARRÓN  
362



MARRÓN  
OSCURO 369



GRIS  
OSCURO 351



GRIS  
AZULADO 354



AZUL  
OSCURO 387



AZUL  
MARINO 390



AZUL  
MEDIO 382



NEGRO  
200



GRIS  
MEDIO 360



VERDE  
TROPICAL 374



VERDE  
PRADO 370



TABACO  
355



GRIS  
OTOÑO 358



PLATA  
356



VERDE  
CARRUAJES 376



VERDE  
MAYO 372



## FAST DRYING SYNTHETIC ENAMEL



Available: Tinting System  
DECOLOR

### DESCRIPTION

Industrial fast drying enamel for machinery, metallic structures, heaters, doors and woods, furniture...  
Available in one component system or two-component system with a catalyst that increases the hardness and the chemical and wather resistance.

Colours: WHITE and COLOURLESS.

SIZES :

750 ml

4 l

CATALYST :

250 ml

### FEATURES

- **Recoatable** : 6-8 hours.
- **Thinner**: Universal.
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Gloss Finish**

Ratio 2 components:  
10-15% by weight of catalyst.

## DECO-METALLIC



### DESCRIPTION

High performance solvent-based acrylic enamel for the protection and decoration of metallic surfaces obtaining a metallic finish.  
Excellent adherence on metallic surfaces of iron or others.

Colours: GOLD, SILVER and COPPER.

SIZE :

250 ml

### FEATURES

- **Recoatable** : 12-24 hours.
- **Thinner**Acrylic.
- **Coverage**: 16-20 m<sup>2</sup>/l.



INDOOR / OUTDOOR

**Metallic Finish**

## DECOFORJA ANTIOXYDANT



### DESCRIPTION

Synthetic enamel with a forging effect, formulated from alkyd resins and antioxidant pigments for the decoration and protection of metal surfaces, obtaining a delicate touch and easy to clean.  
ANTI-RUST

Colours: GREY, BLACK, OXYD RED ,GREEN, BLUE and BROWN.

SIZES :

750 ml

4 l

### FEATURES

- **Recoatable** : 12-24 hours
- **Thinner**: Synthetic and oil
- **Coverage**: 8-12 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Metallic Finish**

### Colores / Colours / Couleurs




GRIS / GRAY / GRIS



VERDE / GREEN / VERT



NEGRO / BLACK / NOIR



ROJO / RED / ROUGE



AZUL / BLUE / BLEU



MARRÓN / BROWN / MARRON

## LINE 4.2. WATER BASE ENAMELS

### DECOPUR AQUA (A+B)



Available: Tinting System  
DECOLOR



UV rays protection



Pot life: 5 hours

#### DESCRIPTION

2-component water-based enamel formulated from aliphatic polyurethane resins for the protection for metallic structures (iron, steel, galvanised steel, aluminum), concrete and cement floors, woods...

Colours: WHITE and COLOURLESS.

White  
Gloss Finish

Colourless  
Gloss Finish  
Satin Finish

SIZES :

Comp. A 4 kg.	Comp. A 0,8 kg.	Comp. A 3 kg.
Comp. B 1 kg.	Comp. B 0,2 kg.	Comp. B 0,75 kg.

#### FEATURES

- **Mixture:** (A+B) 4:1 weight ratio.
- **Recoatable :** 12-24 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Water.
- **Coverage:** 7-10 m<sup>2</sup>/Kg. per coat



2-3 hours

INDOOR / OUTDOOR

### ALBOR AQUA - GLOSS



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality water-based glossy enamel formulated from alkyd polyurethane resins.


Colours: WHITE, BLACK and Chart of Colours ALBOR.

SIZES :

750 ml	4 l
--------	-----

#### FEATURES

- **Recoatable :** 12-24 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



2 hours

INDOOR / OUTDOOR

Gloss Finish

### ALBORLAC AQUA - SATIN



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality water-based satin enamel formulated from alkyd polyurethane resins.

Colours: WHITE and BLACK.

SIZES :

750 ml	4 l
--------	-----

#### FEATURES

- **Recoatable :** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



1-2 hours

INDOOR / OUTDOOR

Satin Finish



## ● ALBORLAC AQUA - MATT



### DESCRIPTION

High quality water-based matt enamel formulated from alkyd polyurethane resins.

Colours: WHITE and BLACK.

Available: Tinting System  
DECOLOR


SIZES :

750 ml

4 l

### FEATURES

- **Recoatable** : 6-8 hours.
- **Thinner**:Water.
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



1-2 hours

INDOOR / OUTDOOR

**Matt finish**

## ● ALBOR ACRYLIC AQUA



### DESCRIPTION

Water-based enamel, produced from acrylic resins. Excellent finish and leveling.

Applications: Indoor and outdoor use. It is perfect for high decoration on all types of supports such as walls, doors, windows, furniture, etc.

Colours: WHITE

SIZES :

750 ml

4 l

15 l

### FEATURES

- **Recoatable** : 6-8 hours.
- **Thinner**:Water.
- **Coverage**: 12-14 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

**Matt finish**



## LINE 4.3. SOLVENT BASED PRIMERS - METALS

### POLYVALENT PRIMER



#### DESCRIPTION

Polyvalent multipurpose primer formulated from modified epoxy ester resins, with zinc phosphate as anti-corrosive pigment. It improves the adherence of subsequent layers on galvanised metals, aluminum, zinc, etc...

Colours: WHITE, OXYD RED, GREEN, BLACK and GREY.

SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable** : 6-8 hours.
- **Thinner**: Universal.
- **Coverage**: 8-12 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

### ANTI-RUST PRIMER



#### DESCRIPTION

Fast drying primer formulated from alkyd resins, especially suitable for maintenance work.

Colours: WHITE, GREEN, BLUE, RED, BLACK, GREY and

SIZES :

750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 12-24 hours.
- **Thinner**: Universal.
- **Coverage**: 10-14 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

### SHOP PRIMER



#### DESCRIPTION

Industrial very-fast drying primer with zinc phosphate as corrosion inhibitor. It improves the adherence of subsequent layers on iron, steel, galvanised metals, aluminum, zinc, etc... Recommended for jobs with short lead times.

Colours: WHITE, GREY.

SIZES :

4 l

15 l

#### FEATURES

- **Recoatable** : 1-2 hours.
- **Thinner**: Universal.
- **Coverage**: 12-14 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

#### Colores / Colours / Couleurs



AZUL / BLUE / BLEU



VERDE / GREEN / VERT



NARANJA / ORANGE / ORANGE



GRIS / GRAY / GRIS



ROJO / RED / ROUGE



NEGRO / BLACK / NOIR

+ BLANCO / WHITE / BLANC

## PRODUCT LINE 4. METAL

### I LINE 4.4. WATER BASED PRIMERS - METALS



#### POLYVALENT PRIMER AQUA



##### DESCRIPTION

Polyvalent water-based multipurpose primer formulated from modified epoxy ester resins, with zinc phosphate as anti-corrosive pigment.

It improves the adherence of subsequent layers on galvanised metals, aluminum, zinc, PVC, etc..

Colours: WHITE, OXYD RED, GREY, BLACK.

SIZES :

750 ml

4 l

##### FEATURES

- **Recoatable:** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 10-12 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

#### WATER BASED EPOXY PRIMER - 2 COMPONENTS



Pot life: 1 hour

##### DESCRIPTION

Two-component water-based anticorrosive epoxy primer for ferrous and non-ferrous surfaces for improving the adhesion of subsequent coats on the metal substrate.

Applications: Iron, galvanised, aluminium, zinc, PVC, concrete floors and some plastics.

Colours: OXYD RED, GREY.

SIZES :

Comp. A  
3 kg.

Comp. B  
0,750 kg.

##### FEATURES

- **Mixture weight ratio (A+B)** 4:1
- **Recoatable:** 24-48 hours.
- **Thinner:** Water.
- **Coverage:** 8-12 m<sup>2</sup>/kg. per coat



8-10 hours

INDOOR / OUTDOOR

#### MULTISURFACES HIGH ADHESION PRIMER



##### DESCRIPTION

Water-based primer for all surfaces to improve the adhesion of subsequent coats on glass, tiles, glazed floors, PVC, plastics, etc... For indoor and outdoor use.

Colours: WHITE.


SIZES :

750 ml

4 l

##### FEATURES

- **Recoatable:** 6-8 hours.
- **Thinner:** Water
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

#### RUST CONVERTER



##### DESCRIPTION

Rust converter for iron and steel.

It neutralizes and reverts the corrosion process through a quick reaction with the residual iron oxide becoming a stable organic complex of black metal ready to be painted after the reaction.

SIZE :

750 ml

##### FEATURES

- **Recoatable:** 3-4 hours.
- **Thinner:** Water.
- **Coverage:** 18-20 m<sup>2</sup>/l per coat



30 min.

INDOOR / OUTDOOR



# PRODUCT LINE 5. WOOD



Wood is one of the most beautiful and noble materials. Take care of it and protect it with the best treatments..



## LINE 5.1. PRIMERS FOR WOOD

### WOOD PROTECTION



#### DESCRIPTION

Impregnation treatment to protect the wood from the weather. penetrates the wood and prevents water and moisture absorption. Regulates the transpiration of the wood and prevents deformation and cracks.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

250 ml

750 ml

4 l

#### FEATURES

- **Recoatable:** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 10-12 m<sup>2</sup>/l per coat



4-6 hours

INDOOR / OUTDOOR

### SEALING (for wood and gypsum)



#### DESCRIPTION

High quality sealing primer for the preparation of wood and plaster surfaces.

Colours: WHITE.


SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable:** 24 hour.
- **Thinner:** Synthetic and oil
- **Coverage:** 10-14 m<sup>2</sup>/l per coat



2-3 hours

INDOOR / OUTDOOR

### WOOD PROTECTION AQUA



#### DESCRIPTION

Impregnation treatment to protect the wood from the weather. Penetrates the wood and prevents water and moisture absorption. Regulates the transpiration of the wood and prevents deformation and cracks.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable:** 4-6 hours.
- **Thinner:** Water
- **Coverage:** 10-12 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

### SEALING AQUA (for wood and gypsum)



#### DESCRIPTION

High quality sealing primer for the preparation of wood and plaster surfaces.

Colours: WHITE.

SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable:** 6 hours.
- **Thinner:** Water
- **Coverage:** 10-14 m<sup>2</sup>/l per coat



2-3 hours

### WOODXYL F&I AQUA



#### DESCRIPTION

Recommended for interior and exterior wood carpentry that need to be protected against xylophagous insects (woodworms and termites), rot and bluish fungi and the eradication of larval xylophagous insects (woodworms) in interior wood.

Product registration: ES/MR(NA)-2017-08-00461

SIZES :

750 ml

2,5 l

20 l

General public

Professional staff

#### FEATURES

- **Recoatable:** 24 hours.
- **Cleaning:** Water
- **Dosage levels:** 200 ml/m<sup>2</sup>



30-60 minutes

## LINE 5.2. WATER BASED VARNISHES



### SINTRA - WATER BASED POLYURETHANE VARNISH



#### DESCRIPTION

High quality water-based interior- exterior varnish, formulated from a dispersion of acrylic modified oil copolymer, polyurethane resins and wax. Extraordinary hardness, applicable on floors, furniture, etc. Decoration and protection of wooden surfaces such as floors, furniture, doors, blinds, chairs, tables, etc.  
Applications: Floors, furniture, doors, windows, chairs, etc.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

750 ml

4 l

#### FEATURES

- **Primer:** WOOD PROTECTION AQUA
- **Recoatable :** 3 hours
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Gloss, satin and matt finish**

### VARNISH AQUA - MATT



UV rays protection

#### DESCRIPTION

High-quality matt water-based varnish based on acrylic resins for the decoration and protection of all types of wood.

Applications: Floors, furniture, doors, windows, chairs, etc.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

750 ml

4 l

#### FEATURES

- **Primer:** WOOD PROTECTION AQUA
- **Recoatable :** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 12-14 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Matt finish**

### VARNISH AQUA - GLOSS



UV rays protection

#### DESCRIPTION

High-quality glossy water-based varnish based on acrylic resins for the decoration and protection of all types of wood.

Applications: Floors, furniture, doors, windows, chairs, etc.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

750 ml

4 l

#### FEATURES

- **Primer:** WOOD PROTECTION AQUA
- **Recoatable :** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 12-14 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Gloss Finish**

### AMBAR - VARNISH AQUA MATT



#### DESCRIPTION

High-quality matt water-based varnish based on acrylic resins for the decoration and protection of all types of wood. Extraordinary hardness.

Applications: Floors, furniture, doors, windows, chairs, etc.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

750 ml

4 l

#### FEATURES

- **Primer:** WOOD PROTECTION AQUA
- **Recoatable :** 3 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Matt finish**

## ● AMBAR - VARNISH AQUA SATIN



### DESCRIPTION

High-quality satin water-based varnish based on acrylic resins for the decoration and protection of all types of wood. Extraordinary hardness.

Applications: Floors, furniture, doors, windows, chairs, etc.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES : 750 ml 4 l

### FEATURES

- **Primer:** WOOD PROTECTION AQUA
- **Recoatable :** 3 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

**Satin Finish**

## ● AMBAR - VARNISH AQUA GLOSS



### DESCRIPTION

High-quality glossy water-based varnish based on acrylic resins for the decoration and protection of all types of wood. Extraordinary hardness.

Applications: Floors, furniture, doors, windows, chairs, etc.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES : 750 ml 4 l

### FEATURES

- **Primer:** WOOD PROTECTION AQUA
- **Recoatable :** 3 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

**Gloss Finish**



## ● DECOPUR AQUA (A+B)



### DESCRIPTION

2-component water based enamel formulated from aliphatic polyurethane resins for the protection for metallic structures (iron, steel, galvanised steel, aluminum), concrete and cement floors, woods.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

Colourless  
Gloss Finish  
Satin Finish

SIZES :

Comp. A 3 kg.

Comp. B 0,75 kg.

Available: Tinting System  
DECOLOR



UV rays protection

### FEATURES

- **Mixture:** (A+B) 4:1 weight ratio.
- **Recoatable :** 12-24 hours.
- **Walkable:** 48-72 hours
- **Thinner:** Water.
- **Coverage:** 7-10 m<sup>2</sup>/Kg. per coat



2-3 hours

INDOOR / OUTDOOR



Pot life: 5 hours.

## I LINE 5.3. SOLVENT BASED VARNISHES

### ● MARINE VARNISH



### DESCRIPTION

High quality gloss varnish formulated from modified synthetic urethane resins for the protection of wood in aggressive environments.

Contains UV rays filter.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

250 ml

750 ml

4 l



UV rays protection

### FEATURES

- **Primer:** WOOD PROTECTION
- **Recoatable :** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 10-14 m<sup>2</sup>/l per coat



4-6 hours

INDOOR / OUTDOOR

Gloss Finish

### ● CLASSIC TEAK OIL



### DESCRIPTION

Mixture of natural oils and resins, to care for and beauty wood. Suitable for unvarnished wood, including exotic and tropical ones.

Colours: COLOURLESS.


SIZES :

750 ml

4 l

### FEATURES

- **Primer:** -
- **Recoatable:** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 12-18 m<sup>2</sup>/l per coat



4-6 hours

INDOOR / OUTDOOR

### ● SYNTHETIC VARNISH - MATT



### DESCRIPTION

High-quality matt synthetic varnish made from alkyd resins for the protection of all types of wood.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :


250 ml

750 ml

4 l

### FEATURES

- **Primer:** WOOD PROTECTION
- **Recoatable:** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



4-6 hours

INDOOR / OUTDOOR

Matt finish



## ● SYNTHETIC VARNISH - SATIN



### DESCRIPTION

High-quality satin synthetic varnish made from alkyd resins for the protection of all types of wood.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :


250 ml

750 ml

4 l

### FEATURES

- **Primer:** WOOD PROTECTION
- **Recoatable:** 12-24 hours
- **Thinner:** Synthetic and oil
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

*Satin Finish*

## ● SYNTHETIC VARNISH - GLOSS



### DESCRIPTION

High-quality gloss synthetic varnish made from alkyd resins for the protection of all types of wood.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

250 ml

750 ml

4 l

### FEATURES

- **Primer:** WOOD PROTECTION
- **Recoatable:** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

*Gloss Finish*

## I LINE 5.4. WATER BASED LASUR



### ● WOOD LASUR AQUA



### DESCRIPTION

High quality water-based wood lasur formulated from acrylic resins and with UV rays filter for the protection and decoration of wood.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

750 ml

4 l

### FEATURES

- **Recoatable:** 8-12 hours.
- **Thinner:** Water.
- **Coverage:** 10-12 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR



UV rays protection

## I LINE 5.5. SOLVENT BASED LASUR

### ● WOOD LASUR



### DESCRIPTION

High quality protective lasur based on synthetic resins and with UV rays filter, for the protection and decoration of wood exposed to the weather.

Colours: COLOURLESS, Chart of Colours VARNISH and LASUR.

SIZES :

250 ml

750 ml

4 l

### FEATURES

- **Recoatable:** 12-24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 12-14 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR



UV rays protection

## I LINE 5.6. SOLVENT BASED ENAMELS

### ● ALBOR GLOSS ANTI-RUST



Available: Tinting System  
DECOLOR

\* WHITE or BLACK

#### DESCRIPTION

High quality glossy enamel from alkyd resins with polyurethane and corrosion inhibitor.  
ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )  
Certified with Fire Reaction Certificate.

Colours: WHITE and Chart of Colours ALBOR.

SIZES : 

250 ml	750 ml	2,5 l *	4 l
--------	--------	---------	-----

#### FEATURES

- **Recoatable** : 12-24 hours.
- **Diluent**: Synthetic and oil
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



4-5 hours  
INDOOR / OUTDOOR

**Gloss Finish**

### ● ALBOR SATIN ANTI-RUST



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality satin enamel from alkyd resins with polyurethane and corrosion inhibitor.  
ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )  
Certified with Fire Reaction Certificate.

Colours: WHITE and BLACK.

SIZES : 

250 ml	750 ml	2,5 l	4 l
--------	--------	-------	-----

#### FEATURES

- **Recoatable** : 12-24 hours.
- **Diluent**: Synthetic and oil
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



4-5 hours  
INDOOR / OUTDOOR

**Satin Finish**

### ● ALBOR MATT ANTI-RUST



Available: Tinting System  
DECOLOR

#### DESCRIPTION

High quality matt enamel from alkyd resins with polyurethane and corrosion inhibitor.  
ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )  
Certified with Fire Reaction Certificate.


Colours: WHITE and BLACK.

SIZES : 

250 ml	750 ml	2,5 l	4 l
--------	--------	-------	-----

#### FEATURES

- **Recoatable** : 12-24 hours.
- **Diluent**: Synthetic and oil
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



4-5 hours  
INDOOR / OUTDOOR

**Matt finish**

### ● FAST DRYING SYNTHETIC ENAMEL



Available: Tinting System  
DECOLOR

#### DESCRIPTION

Industrial fast drying enamel for machinery, metallic structures, heaters, doors and woods, furniture...  
Available in one component system or two-component system with a catalyst that increases the hardness and the chemical and water resistance.

Colours: WHITE and COLOURLESS.

SIZES : 

750 ml	4 l
--------	-----

  
CATALYST: 

250 ml
--------

#### FEATURES

- **Recoatable** : 6-8 hours.
- **Thinner**: Universal.
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



1 hour  
INDOOR / OUTDOOR

**Gloss Finish**

Ratio 2 components:  
10-15% by weight of catalyst.

## LINE 5.7. WATER BASED ENAMELS



### DECOPUR AQUA (A+B)



#### DESCRIPTION

2-component water-based enamel formulated from aliphatic polyurethane resins for the protection for metallic structures (iron, steel, galvanised steel, aluminum), concrete and cement floors, woods...

Colours: WHITE and COLOURLESS.

Available: Tinting System  
DECOLOR




UV rays protection



Pot life: 5 hours

#### FEATURES

- **Mixture:** (A+B) 4:1 weight ratio.
- **Recoatable:** 12-24 hours.
- **Walkable:** 48-72 hours
- **Thinner:** Water.
- **Coverage:** 7-10 m<sup>2</sup>/Kg. per coat



2-3 hours

INDOOR / OUTDOOR

**White**  
Gloss Finish

**Colourless**  
Gloss Finish  
Satin Finish

SIZES :

Comp. A 4 kg.

Comp. A 0,8 kg.

Comp. A 3 kg.

Comp. B 1 kg.

Comp. B 0,2 kg.

Comp. B 0,75 kg.

### ALBOR AQUA - GLOSS



#### DESCRIPTION

High quality water-based glossy enamel formulated from alkyd polyurethane resins.

Colours: WHITE, BLACK and Chart of Colours ALBOR.

Available: Tinting System  
DECOLOR


SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable:** 12-24 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



2 hours

INDOOR / OUTDOOR

**Gloss Finish**

### ALBORLAC AQUA - SATIN



#### DESCRIPTION

High quality water-based satin enamel formulated from alkyd polyurethane resins.

Colours: WHITE and BLACK.

Available: Tinting System  
DECOLOR


SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable:** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



1-2 hours

INDOOR / OUTDOOR

**Satin Finish**

### ALBORLAC AQUA - MATT



#### DESCRIPTION

High quality water-based matt enamel formulated from alkyd polyurethane resins.

Colours: WHITE and BLACK.

Available: Tinting System  
DECOLOR

SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable:** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



1-2 hours

INDOOR / OUTDOOR

**Matt finish**



# PRODUCT LINE 6. FLOORS AND SPORTS



Pay attention to your steps. Our products bring resistance and longevity to your floors, no matter if they are industrial, urban, domestic or sporting, your step could be steady.



## LINE 6.1. SOLVENT BASED FLOOR COATINGS

### ● DECO-EPOXY 2C (SOLVENT BASED)



#### DESCRIPTION

Two-component epoxy with a glossy finish, for the protection of all types of floors and metal structures, etc.

#### Characteristics:

- \* Excellent adhesion on concrete and metal substrates.
- \* Hard, waterproof, elastic and very resistant coating.
- \* High chemical resistance (acids, alkalis, oils, etc.).
- \* High mechanical resistance.
- \* Anti-dust coating for concrete floors.

Colours: WHITE, OXYD RED, GREY(Ral 7004) and GREEN.



Pot life: > 10 hours

SIZES :

Comp. A  
8 kg.

Comp. B  
2 kg.

#### FEATURES

- **Mixture (A+B):** 4:1 weight ratio.
- **Recoat:** 12-24 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Epoxy Solvent.
- **Coverage:** 2-3 m<sup>2</sup>/Kg. finish.



Gloss Finish

### ● DECO-EPOXY 2C - LD (WITHOUT SOLVENT)



#### DESCRIPTION

Two-component epoxy paint for the protection of concrete floors, metal structures, etc. Does not contain solvents (100% solids).

#### Characteristics:

- \* Excellent adhesion to concrete and metal substrates.
- \* Hard, waterproof, elastic and very resistant coating.
- \* High chemical resistance (acids, alkalis, oils, etc.).
- \* High mechanical resistance.
- \* Anti-dust coating for concrete floors.

Colours: WHITE, OXYD RED, GREY(Ral 7004) and GREEN.



Pot life: 25-35 min.

SIZES :

Comp. A  
8 kg.

Comp. B  
2 kg.

#### FEATURES

- **Mixture (A+B):** 4:1 weight ratio.
- **Recoat:** 12-24 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Epoxy Solvent.
- **Coverage:** 6-8 m<sup>2</sup>/Kg. finish.



Gloss Finish

### ● DECO-EPOXY 3D 2 COMPONENTS (WITHOUT SOLVENT)



#### DESCRIPTION

Clear two-component epoxy coating with high chemical and mechanical resistance for the protection and decoration of floors. Does not contain solvents (100% solids).

#### Characteristics:

- \* High transparency.
- \* Excellent resistance to yellowing and water stains.
- \* Very good resistance to solvents, detergents, diluted acids and alkalis, petrol, diesel, brake fluid and lubricating oils.
- \* High mechanical resistance.
- \* Anti-dust effect.

Colours: COLOURLESS.



Pot life: 35-40 min.

SIZES :

Comp. A  
8 kg.

Comp. B  
4,8 kg.

Comp. A  
0,4 kg.

Comp. B  
0,25 kg.

#### FEATURES

- **Mixture (A+B):** 1:0,6 weight ratio.
- **Recoat:** 16-24 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Epoxy Solvent.
- **Coverage:** 1 m<sup>2</sup>/Kg. finish.



Gloss Finish

## ROAD MARKING PAINT



### DESCRIPTION

Solvent-based acrylic paint, good adhesion, high mechanical resistance for horizontal marking of concrete, cement and tar floors.

Applications: Car parks, fords, crossings, pavements, etc.

Colours: WHITE, YELLOW(Ral 1003), RED(Ral 2002), BLUE (Ral 5015), BLACK(Ral 9004).

SIZES :

4 l

15 l

### FEATURES

- **Recoat:** 12-24 hours.
- **Walkable:** 48 hours.
- **Thinner:** Acrylic.
- **Coverage:** 8-10 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

**Satin finish**

## ACRYLIC FLOOR PAINT



### DESCRIPTION

Solvent based acrylic floor paint. High abrasion and wear resistance. It prevents erosion and extends the life of the pavement.

Excellent anchoring and hardness.

Colours: WHITE, OXYD RED, GREY (Ral 7004) and GREEN.

SIZES :

4 l

15 l

### FEATURES

- **Recoat:** 12-24 hours.
- **Walkable:** 48 hours.
- **Thinner:** Acrylic.
- **Coverage:** 8-10 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

**Satin finish**

## FLOOR VARNISH



### DESCRIPTION

Clear acrylic varnish, high resistance to abrasion and wear. It prevents abrasion and prolongs the life of the treated floors.

Applications: Concrete (waxed, printed, etc.), cement mortar, absorbent ceramics.

SIZES :

1 l

5 l

20 l

### FEATURES

- **Recoat:** 24 hours.
- **Walkable:** 12-24 hours.
- **Thinner:** Acrylic.
- **Coverage:** 8-10 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

**Gloss Finish**

## LINE 6.2. WATER BASED FLOOR COATINGS



## DECO-FLOORS AQUA



### DESCRIPTION

Water-based acrylic paint with good adherence, for the protection and decoration of floors in car parks, warehouses, sports fields, etc.

Good resistance to light traffic.

Colours: WHITE, RED, GREEN, GREY(Ral 7004).

SIZES :

4 l

15 l

### FEATURES

- **Primer:** FLOOR PRIMER AQUA
- **Recoat:** 6-8 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Water
- **Coverage:** 8-10 m<sup>2</sup>/l per coat



1 hour

INDOOR / OUTDOOR

**Satin Finish**

Available: Tinting System  
DECOLOR

## ● DECO-EPOXY AQUA 2 COMPONENTS (A+B)



### DESCRIPTION

2-component water-based epoxy paint. Hardened with polyamide, for the protection of concrete floors, metal structures, etc..

Colours: WHITE, RED, GREY (Ral 7004), GREEN and

#### Colours

Comp. A	Comp. B
3 kg.	0,75 kg.

#### Colourless

Comp. A	Comp. B
9 kg.	3 kg.

SIZES :

Comp. A	Comp. B
12 kg.	3 kg.

Available: Tinting System  
DECOLOR



Pot life: 60 min.

### FEATURES

- **Mixture (A+B) COLOURS:** 4:1 weight ratio.
- **Mixture (A+B) COLOURLESS:** 3:1 weight ratio.
- **Recoat:** 24 hours.
- **Walkable:** 48 hours.
- **Thinner:** Water.
- **Coverage:** 2,5-3 m<sup>2</sup>/Kg. finish.



INDOOR

**Satin finish**

## ● DECO-FLOORS AQUA - CLEAR



### DESCRIPTION

Waterproofing protective varnish for porous and non-porous surfaces. Protects and decorates terrace floors, cement and concrete floors, printed floors, bricks, stone, etc.


Colours: COLOURLESS.

SIZES :

4 l	15 l
-----	------

### FEATURES

- **Primer:** FLOOR PRIMER AQUA
- **Recoat:** 6-8 hours.
- **Walkable:** 72 hours
- **Thinner:** Water
- **Coverage:** 10-12 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Satin Finish**

## ● DECO-EPOXY AQUA 1 COMPONENT



### DESCRIPTION

DECO-EPOXI 1C PRE-CATALYZED, ready-to-use, water-based acrylic-epoxy hybrid technology, with performance like conventional 2C epoxy systems, quickly access of the painted surface. Especially for garages, commercial floors, hospital rooms, surgery rooms, restaurant kitchens, schools, pool terraces, metal structures, walls with high resistance to abrasion, etc.

Colours: WHITE, RED, GREY(Ral 7004).

SIZES :

4 l	15 l
-----	------

Available: Tinting System  
DECOLOR

### FEATURES

- **Primer:** FLOOR PRIMER AQUA
- **Recoat:** 4-6 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Water
- **Coverage:** 8 m<sup>2</sup>/l.



INDOOR / OUTDOOR

**Satin Finish**

## I LINE 6.3. SPORTS

### ● SWIMMING POOLS PAINT



### DESCRIPTION

High quality solvent based paint specially indicated for the protection and decoration of swimming pools. Contact with water: after 10 days.

Colours: WHITE and BLUE (S 1050-B).

SIZE :

4 l
-----

### FEATURES

- **Recoat:** 12-24 hours.
- **Thinner:** Acrylic
- **Coverage:** 8-10 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Satin Finish**

## ● SWIMMING POOLS PAINT - AQUA



### DESCRIPTION

High quality water based paint specially indicated for the protection and decoration of swimming pools.  
Contact with water: after 10 days.

Colours: WHITE and BLUE

SIZES :

4 l

15 l

### FEATURES

- **Recoatable** : 12-24 hours.
- **Thinner**: Water.
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Satin finish**

## ● SPORT RANGE



### DESCRIPTION

High quality water-based paint specially indicated for the protection and decoration of sports centres.

Colours: TENNIS RED, BLUE (Ral 5015) and FRONTON GREEN

SIZES :

4 l

15 l

### FEATURES

- **Recoatable** :4-6 hours
- **Thinner**: Water.
- **Coverage**: 7-10 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Matt finish**

## I LINE 6.4. SANITARY / FOOD USE FLOORS

### ● DECO - EPOXY 2C SANITARY/ FOOD USE



For contact with drinking water



Pot life: 35-40 min.

### DESCRIPTION

Two-component epoxy coating with high chemical and mechanical resistance, for the protection and decoration of drinking water tanks, waste water and food processing plants.

Anti-dust effect. Easy to wash, decontaminate and maintain.

Does not contain solvents (100% solids).

CERTIFICATE OF SANITARY CONFORMITY.

Colours: COLOURLESS.

SIZES :

Comp. A  
8 kg.

Comp. B  
3,6 kg.

Comp. A  
3kg.

Comp. B  
1,35 kg.

### FEATURES

- **Mixture (A+B)**: 1:0.45 weight ratio.
- **Recoatable**: 12-24 hours.
- **Walkable**: 72 hours.
- **Thinner**: Epoxy Solvent.
- **Coverage**: 2,5 m<sup>2</sup>/Kg. finish.



INDOOR

**Gloss Finish**

## I LINE 6.5. PRIMERS

### ● FLOOR PRIMER



### DESCRIPTION

Solvent-based primer for interior and exterior use, to facilitate the adherence of subsequent coats on cement, concrete, terrazzo, etc.

Characteristics:

\* Excellent adherence on supports such as cement, concrete, terrazzo, etc.

\* Uniforms the absorption capacity of the substrate and maximises the adherence.

\* Highly resistant to water and weathering. Non-yellowing.

\* One component.

\* Fast drying.

SIZES :

4 l

15 l

### FEATURES

- **Recoatable** : 12-24 hours.
- **Thinner**: Acrylic
- **Coverage**: 10-12 m<sup>2</sup>/l.



INDOOR / OUTDOOR



## FLOOR PRIMER AQUA



### DESCRIPTION

Water-based primer for interior and exterior use to facilitate the adherence of subsequent coats on cement, concrete, glass, tiles, terrazzo, terracotta, etc.

Suitable even as a primer and sealer for concrete or cement substrates, before the application of floor coverings.

SIZES :

4 l

15 l

### FEATURES

- **Recoatable** : 6-8 hours.
- **Thinner**: Water.
- **Coverage**: 10-14 m<sup>2</sup>/l.



1 hour  
INDOOR / OUTDOOR

## PRIMER DECO-EPOXY 2C-LD



### DESCRIPTION

2-component epoxy primer to improve the adherence on concrete substrates, cement substrates or epoxy mortars.

WITHOUT solvents (100% solids).

SIZES :

Comp. A  
8 kg.

Comp. B  
4,8 kg.

### FEATURES

- **Mixture (A+B)**: 1:0,6 weight ratio.
- **Recoatable**: 24 hours.
- **Walkable**: 72 hours.
- **Thinner**: Epoxy Solvent.
- **Coverage**:  
Concrete with low or medium porosity: 1 x 2-3 m<sup>2</sup>/Kg.  
Concrete with high porosity: 2 x 2-3 m<sup>2</sup>/Kg.



8 hours  
INDOOR / OUTDOOR



Pot life: 35-40 min.

## LINE 6.6. PUTTY

### SELF-LEVELING EPOXY PUTTY 2C



### DESCRIPTION

Epoxy resin putty for crack repair, joint sealing, hole filling on concrete and mineral substrates.

SIZES :

Comp. A  
3,2 kg.

Comp. B  
0,2 kg.

### FEATURES

- **Mixture (A+B)**: 94:6 weight ratio.
- **Recoatable**: 24-48 hours.
- **Walkable**: 24-48 hours.
- **Thinner**: Water.
- **Coverage**:  
3 Kg. / m<sup>2</sup> / 2 mm.



INDOOR / OUTDOOR



Pot life: 35-40 min.

## LINE 6.7. ADDITIVES

### ANTI-SLIP ADDITIVE



### DESCRIPTION

Particles with high resistance to corrosion and abrasion, solid, inert and with high chemical resistance, ideal for giving treated floors a high anti-slip capacity.

SIZE :


600 g

### FEATURES

- **Mixture weight ratio**: 6-10%



# PRODUCT LINE 7. HIGH DECORATION

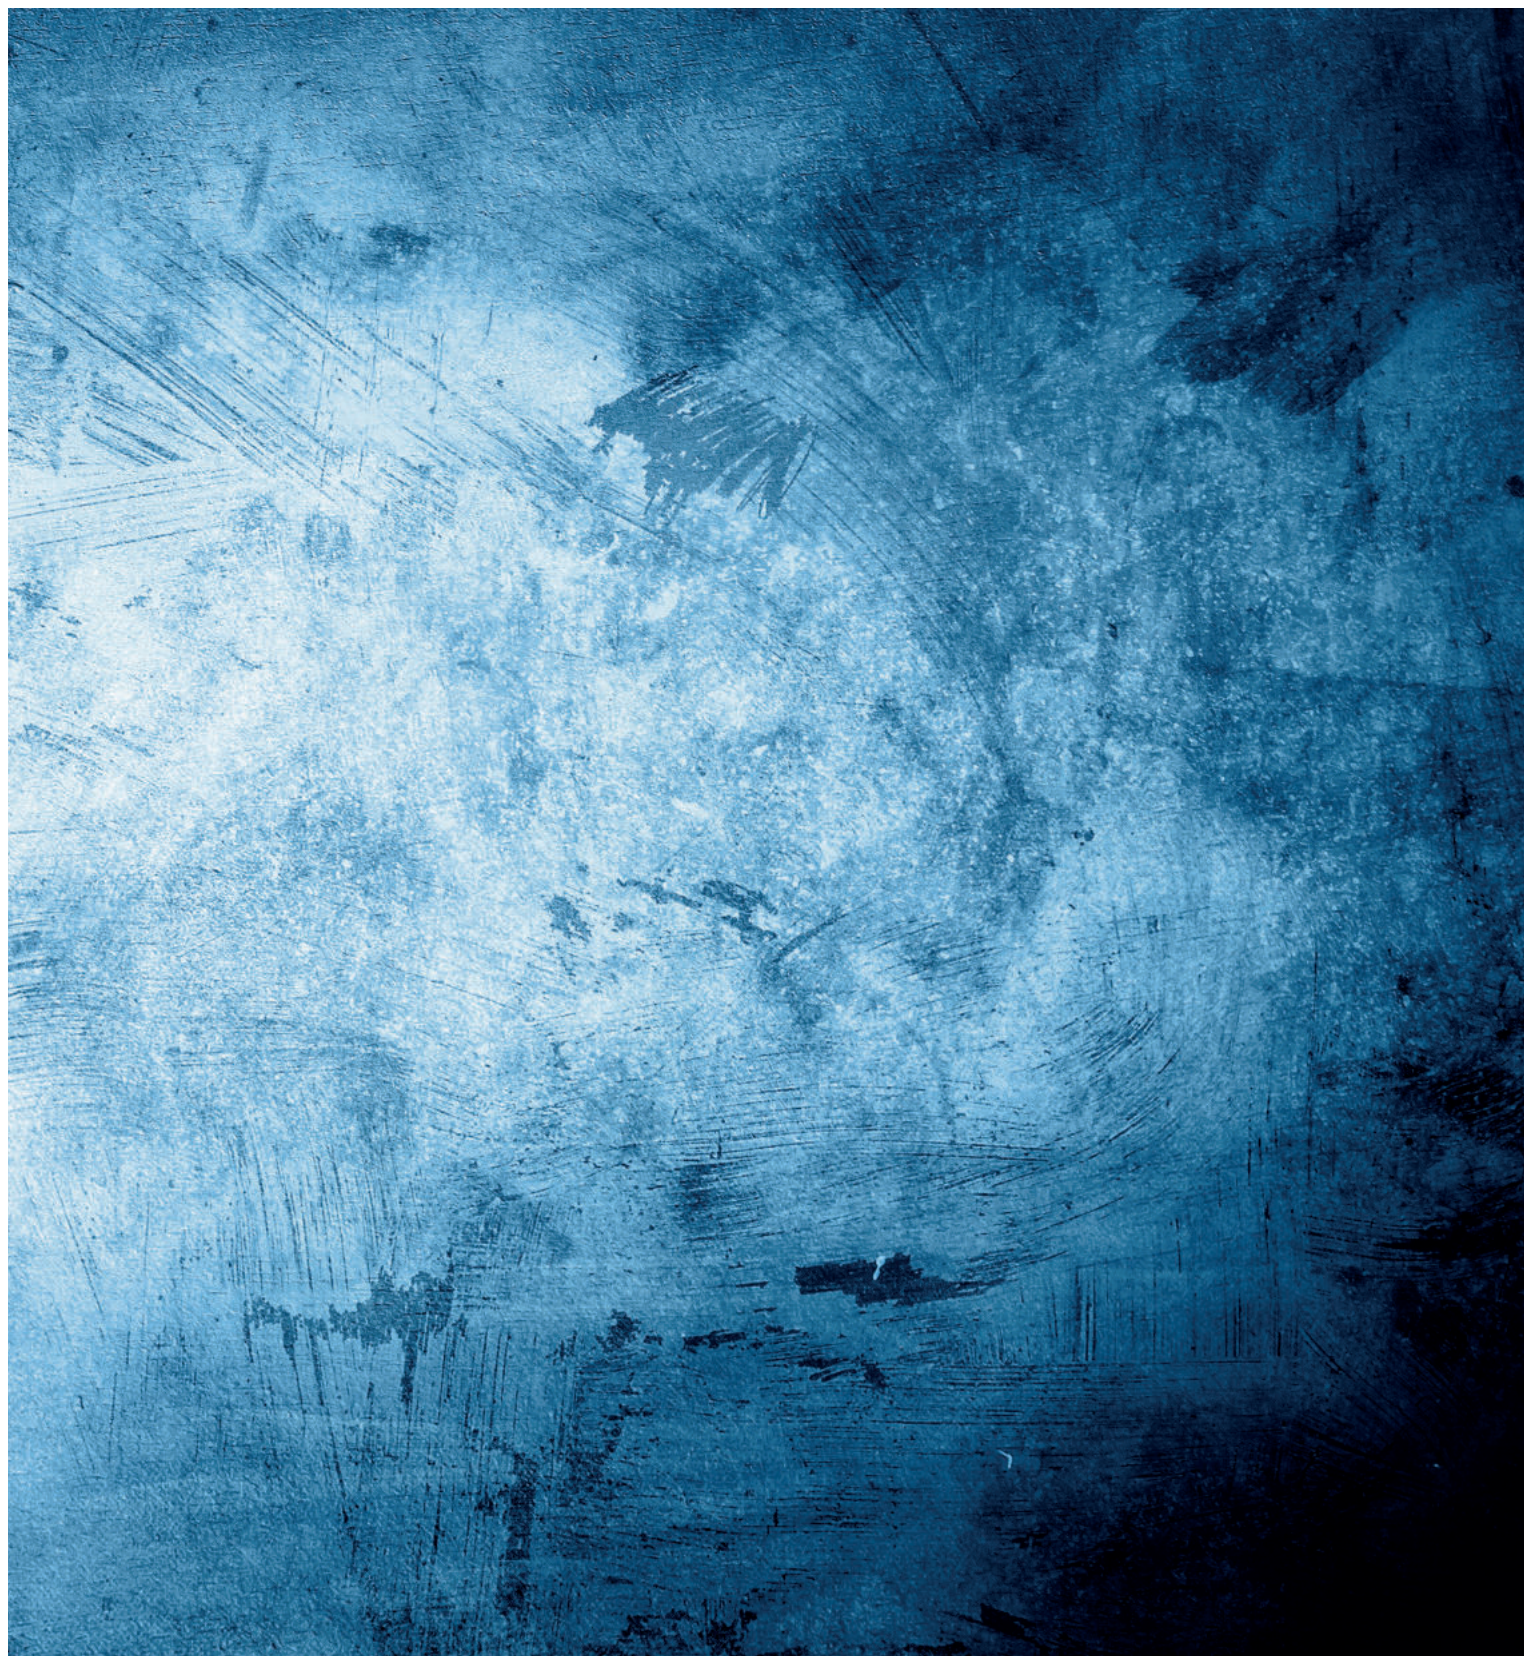

Unlimited decoration, high decoration. Our products will help you to express yourself and give expression to your creativity and good taste.



## LINE 7.1. DECORATIVE PAINTS

### COSTA - DECORATIVE BASE



#### DESCRIPTION

High quality paint for the protection and decoration of interior surfaces in a single coat. Base for COSTA decorative effects.

SIZE :

COLOURS

3 l

BASES P-TR

3 l

#### FEATURES

- **Primer:** see technical data sheet
- **Recoatable :** 4-6 hours.
- **Thinner:** Water.
- **Coverage:** 8m<sup>2</sup>/l



### REFLEJO DE ARENA



#### DESCRIPTION

Sophisticated blend of natural river sand and pearly sand, a fine granite decoration that is both matt and satin depending on the angle of light reflection.

SIZE :

1 l

#### FEATURES

- **Primer:** see technical data sheet
- **Recoatable :** 12 hours.
- **Thinner:** Water.
- **Coverage:** 1,2Kg./10 m<sup>2</sup>.



### IBIZA



#### DESCRIPTION

Metallic water based paint with maximum performance and high metallic pigment content. Maximum washability, hardness and adherence.

Ideal for kitchens and bathrooms, passageways, exteriors, all metal surfaces, wood, etc.

SIZE :

1 l

#### FEATURES

- **Primer:** see technical data sheet
- **Recoatable :** 4-6 hours
- **Thinner:** Water.
- **Coverage:** 12-16 m<sup>2</sup>/l.



### CLÁSICO



#### DESCRIPTION

Decorative matt paint with effects for interior use. Easy to apply in 2 coats. Its wide range of colours makes it ideal for any type of interior environments.

SIZE :

1 l

#### FEATURES

- **Primer:** see technical data sheet
- **Recoatable :** 12-24 hours
- **Thinner:** Water.
- **Coverage:** 1,2 kg./10m<sup>2</sup>



## ABSTRACTO



### DESCRIPTION

Matt interior decorative paint with fine, delicately pearled particles, easy to apply in 2 coats. Its wide range of colours makes it ideal for any type of interior environments.

SIZE :

1 l

### FEATURES

- **Primer:** see technical data sheet
- **Recoatable :** 12 hours
- **Thinner:** Water.
- **Coverage:** 1,2 kg./10m<sup>2</sup>



INDOOR

## PAILLETES



### DESCRIPTION

Decorative and durable coating which is applied by blowing the flakes onto a delayed-drying paint base. Once dried, the scales must to be covered with a clear varnish. The mixture of scales of different sizes, shapes and colours will create many different effects.

SIZE :

2 Kg

BASE PAILLETES

3 l

### FEATURES

- **Primer:** see technical data sheet
- **Thinner:** Water
- **Coverage:** 180 g/m<sup>2</sup>.

INDOOR

## DECO - ESTUC



### DESCRIPTION

Classic Venetian decorative stucco to obtain marble imitation effects. Fine and smooth finish forming waters and veins with which very elegant effects are achieved.

Colours: NEUTRAL and Chart of Colours DECO-ESTUC.

SIZES :

5 kg.

15 kg.

### FEATURES

- **Recoatable :** 24 hours.
- **Thinner:** Water.
- **Coverage:** 1-2 m<sup>2</sup>/kg.



2 hours

INDOOR

## LINE 7.2 ACCESORIES

### PROTECTIVE WAX OF STUCCOS



Waterproof

### DESCRIPTION

Synthetic wax for the protection and increase of the shine of stuccos. Water-based product.

Colours: COLOURLESS.

SIZE :

750 ml.

### FEATURES

- **Fond:** Déco-Estuc
- **Polish:** 2-3 hours.
- **Thinner:** Non.
- **Coverage:** 6-10 g/m<sup>2</sup>.




INDOOR / OUTDOOR



## PRODUCT LINE 7. HIGH DECORATION

### ● Chart of Colours COSTA

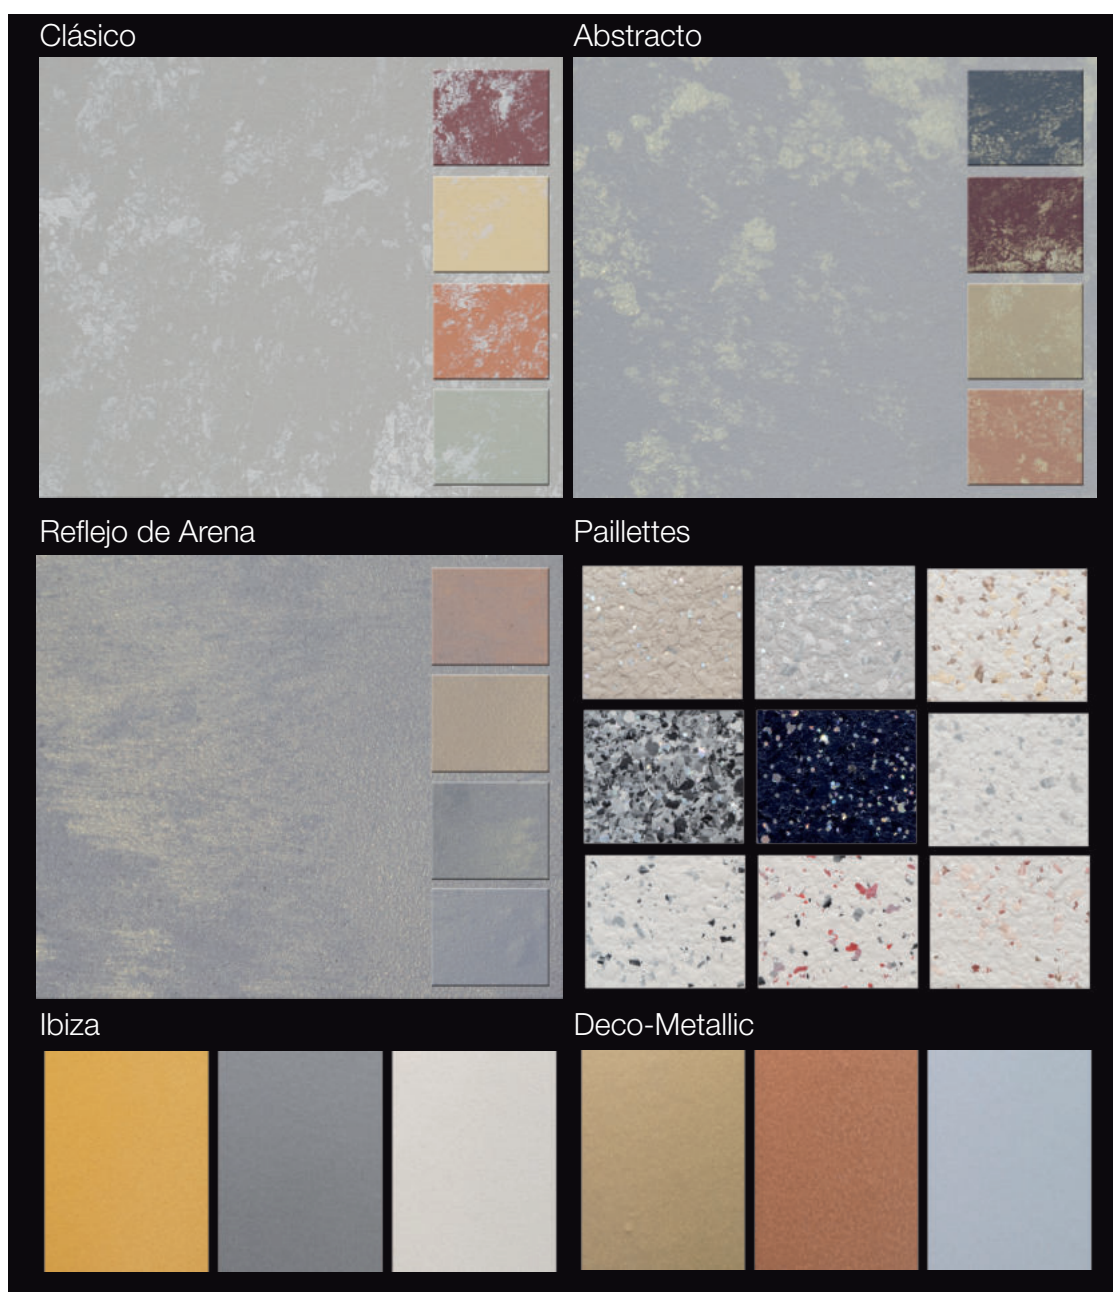

### ● Chart of Colours DECO-STUC





# PRODUCT LINE 8. SURFACE PREPARATION



The correct preparation of the surface will determine the success or failure of subsequent treatments.  
Find the perfect product to achieve that desired finish.



## PRODUCT LINE 8. SURFACE PREPARATION

### LINE 8.1. SOLVENT BASED PRIMERS

#### ANTI-HUMIDITY PAINT



##### DESCRIPTION

Waterproofing and efflorescence-proofing primer that blocks passage of moisture due to leaks, seepage, rain, etc.

Colours: WHITE

SIZES :

750 ml

4 l

##### FEATURES

- **Recoatable:** 24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 4-6 m<sup>2</sup>/l per coat



2-3 hours

INDOOR / OUTDOOR

#### SEALING PRIMER (for wood and plaster)



##### DESCRIPTION

High quality sealing primer for preparation of wood and plaster surfaces.

Colours: WHITE

SIZES :

750 ml

4 l

##### FEATURES

- **Recoatable:** 24 hours.
- **Thinner:** Synthetic and oil
- **Coverage:** 10-14 m<sup>2</sup>/l per coat



2-3 hours

INDOOR / OUTDOOR

#### DECOFIX



##### DESCRIPTION

Fine particle acrylic primer with high fixing and penetration capacity in porous substrates such as plaster, brick, concrete, etc. Prevents erosion and increases the life of the substrate. Ready-to-use product, do not dilute.

SIZES :

1 l

5 l

20 l

##### FEATURES

- **Recoatable:** 12-24 hours.
- **Thinner:** Acrylic
- **Coverage:** 20-25 m<sup>2</sup>/l per coat



15-20 min.

INDOOR / OUTDOOR

### LINE 8.2. WATER BASED FIXATIVES



#### ANTI-HUMIDITY PRIMER - AQUA



##### DESCRIPTION

Waterproofing and efflorescence-proofing water based primer that blocks passage of moisture due to leaks, seepage, rain, etc. Suitable as finish coat.

Colours: WHITE

SIZES :

750 ml

4 l

##### FEATURES

- **Recoatable:** 6-8 hours.
- **Thinner:** Water
- **Coverage:** 6-8 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

## PRODUCT LINE 8. SURFACE PREPARATION

### ● DECOKRIL RAPID



#### DESCRIPTION

Water-based pigmented fixer for all types of masonry substrates. Also suitable to be used on CONCRETE AND FRESH MORTAR. Excellent adherence to concrete. Excellent resistance to alkalis and water. Perfect barrier against efflorescence. Good resistance to UV rays. Solvent-free. Ready-to-use product - Do not dilute.

Colours: WHITE.

SIZE :

10 l


#### FEATURES

- **Recoatable:** 4 hours
- **Coverage:** 10-12 m<sup>2</sup>/l.



30-60 min.

### ● DECOKRIL FLEX



#### DESCRIPTION

Water-based acrylic resin designed to create extremely flexible cement-based waterproof membranes. It provides an exceptional protection and fill the small cracks through a variety of cement-based substrates.

Elongation until rupture: 450% UNE 53413

Formulated for use in two-component mixture (DECOKRIL FLEX + dry cement mix) on new or existing cement substrates.

SIZE :

20 l

#### FEATURES

- **Thinner:** Water.
- **Coverage:** 2-8 m<sup>2</sup>/l.



24 hours

Mix 65-60 parts liquid with  
35-40 parts cement by weight.

### ● DECOKRIL



#### DESCRIPTION

Concentrated water-based fixative with high penetration and fixing capacity on deteriorated substrates.

Improves adherence and absorption uniformly.

SIZES :

750 ml

5 l

10 l

#### FEATURES

- **Recoatable :** 4 hours.
- **Thinner:** Water
- **Coverage:** 25-30 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

### ● DECOKRIL PENETRATING



#### DESCRIPTION

Fine-particle water-based acrylic fixative with high penetration and fixing capacity on porous substrates: plaster, cement mortars, concrete, etc.

Ready-to-use product. Do not dilute.

SIZES :

750 ml

5 l

10 l

#### FEATURES

- **Recoatable :** 4 hours.
- **Thinner:** Water.
- **Coverage:** 25-30 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR



## PRODUCT LINE 8. SURFACE PREPARATION

### DECOKRIL PIGMENTED



#### DESCRIPTION

Fine-particle water-based acrylic fixative, white pigmented, with high penetration and fixing capacity on porous substrates: plaster, cement mortars, concrete, etc.  
Ready-to-use product. Do not dilute.


Colours: WHITE

SIZE :

10 l

#### FEATURES

- **Recoatable:** 4 hours.
- **Thinner:** Water.
- **Coverage:** 10-15 m<sup>2</sup>/l.



30-60 min.

INDOOR / OUTDOOR

### ALKIL POLIMUL 202



#### DESCRIPTION

Concentrated water-based printing with high fixing capacity on deteriorated substrates. Improves adherence and evens out the absorption of subsequent layers.

SIZES :

1 l

5 l

20 l

#### FEATURES

- **Recoatable:** 4 hours.
- **Thinner:** Water.
- **Coverage:** 25-33 m<sup>2</sup>/l.



30-60 min.

INDOOR / OUTDOOR

### DECOKRIL ANCHORAGE



#### DESCRIPTION

Granular primer from acrylic copolymers and selected grains. High fixing and penetration capacity and high resistance to alkalis. It facilitates a perfect anchorage (ideal for Griffi and Frotassé) and on supports with adherence difficulties (plaster, paint, etc.)  
It evens out the absorption by substrate of subsequent layers.

SIZE :

10 l

#### FEATURES

- **Recoatable:** 4 hours.
- **Thinner:** Water.
- **Coverage:** 3-4 m<sup>2</sup>/l.



1-2 hours

### DECO-UNION



#### DESCRIPTION

Adherence under-coat primer for mortar of concrete and plaster with a long time open. Excellent penetration into supports allowing to work on it more than 24 hours after applied. Avoid the fast elimination of water from the mortars allowing the correct curing of the same and assuring a good adherence among coats.

SIZES :

1 l

5 l

20 l

#### FEATURES

- **Thinner:** Water.
- **Coverage:** 5-7 m<sup>2</sup>/l.



## PRODUCT LINE 8. SURFACE PREPARATION

### ● SEALING PRIMER- AQUA



#### DESCRIPTION

High quality water based sealing primer for preparation of wood and plaster surfaces.

Colours: WHITE.

SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable :** 6 hours.
- **Thinner:** Water
- **Coverage:** 10-14 m<sup>2</sup>/l per coat



2-3 hours

## I LINE 8.3. PUTTIES

### ● DECOPLAST STANDARD - POWDER



#### DESCRIPTION

Powder putty, special for filling holes or cracks and repairing irregularities in the substrate.  
Easy to sand.

SIZES :

1 kg.

5 kg.

15 kg.

#### FEATURES

- **Coverage:** 1,75-1,85 Kg/m<sup>2</sup>/mm.
- **Drying time:** 1 mm/5-6 hours  
2 mm/9-10 hours

### ● DECOPLAST RESTORER - POWDER



#### DESCRIPTION

Powder putty , special for coating painted surfaces (droplets, plaster, etc.) and repairing irregularities in interior walls.  
Can be applied in thick or thin layers

SIZE :

15 kg.

#### FEATURES

- **Coverage:** 1,75-1,85 Kg/m<sup>2</sup>/mm.
- **Drying time:** 1 mm/5-6 hours  
2 mm/9-10 hours

### ● DECOPLAST EXTERIOR - POWDER



#### DESCRIPTION

Micronised powder putty based on mineral binders and fillers, for repairing masonry, plastering, cracks and levelling on cement, bricks, blocks, concrete, etc.  
Special for outdoor use  
Easy to sand

SIZE :

5 kg.

15 kg.

#### FEATURES

- **Coverage:** 1,50 Kg/m<sup>2</sup>/mm.
- **Drying time:** 1 mm/8 hours

## ● DECOPLAST - READY TO USE



### DESCRIPTION

Ready-to-use putty, special for plastering, filling holes or cracks and repairing irregularities in the substrate.

SIZES :

250 ml

750 ml

4 l

20 kg.

### FEATURES

- **Thinner:** Water.
- **Coverage:** 1,75-1,85 kg./m<sup>2</sup>/1 mm
- **Drying time:** 1 mm/5-6 hours  
2 mm/9-10 hours



INDOOR / OUTDOOR

## ● DECOPLAST ANTI-FISSURES FIBER



### DESCRIPTION

Elastic sealing putty with fibers for the specific treatment of cracks.

SIZES :

1 kg.

5 kg.

### FEATURES

- **Thinner:** Water.
- **Coverage:** 1,60-1,70 kg./m<sup>2</sup>/1 mm
- **Drying time:** 1 mm/6-8 hours



INDOOR / OUTDOOR



# PRODUCT LINE 9. TINTING SYSTEM



Find your special colour and bring it to your life.



## LINE 9.1. WATERBORNED BASES



### MATT DECOMAT - BASE



#### DESCRIPTION

High quality matt paint based on 100% acrylic copolymers for the protection and decoration of interior and exterior surfaces.

Applications: Walls and ceilings, plaster, plasterboard, etc.

BASES: P – D – TR

SIZES :

750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 8-12 m<sup>2</sup>/l per coat



1 hour  
INDOOR / OUTDOOR

**Wet abrasion resistance:**  
**CLASS 1** as per UNE-EN 13300

### MATE EXTRA - BASE



#### DESCRIPTION

High quality matt paint for the protection and decoration of interior and exterior surfaces.

Applications: Walls and ceilings, plaster, plasterboard, etc.

BASES: P – TR

SIZES :

750 ml

4 l

14 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



1 hour  
INDOOR / OUTDOOR

**Wet abrasion resistance:**  
**CLASS 2** as per UNE-EN 13300

### SATIN PAINT - BASE



#### DESCRIPTION

High quality satin paint specially formulated for our tinting system.

Applications: Walls and ceilings, plaster, plasterboard, etc.

BASES: P – D – TR

SIZES :

750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



1 hour  
INDOOR / OUTDOOR

**Wet abrasion resistance:**  
**CLASS 1** as per UNE-EN 13300

**Gloss:** 60° 10-15 GU  
UNE-EN ISO 2813

### IMPER-ELAST SMOOTH - BASE



#### DESCRIPTION

Smooth elastic waterproofing coating for the protection and waterproofing of exterior vertical walls, formulated from 100% acrylic copolymers. Curable by UV rays.

Product with protection against fungi and algae.

BASES: P – TR

SIZES :

4 l

15 l

#### FEATURES

- **Recoatable** : 24 hours.
- **Thinner**: Water.
- **Coverage**: 4-6 m<sup>2</sup>/l per coat



2-4 hours



CLASS 3

CLASS 2

# PRODUCT LINE 9. TINTING SYSTEM

## ● DECOSIL - BASE



### DESCRIPTION

SILOXANE-based smooth coating for the decoration and protection of all kind of building surfaces. It combines high impermeability with vapour permeability. Its properties prevent dust and dirt from adhering to its surface: Anti-dust and Auto-cleaning.

Product with protection against fungi and algae.

BASES: P – TR

SIZES :

4 l

14 l

### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 7-10 m<sup>2</sup>/l per coat



CLASS 3

CLASS 1

## ● DECORTEX SMOOTH PREMIUM - BASE



### DESCRIPTION

High quality smooth coating formulated from 100% acrylic copolymers, for the protection and decoration of vertical exterior walls.

Product with protection against fungi and algae.

SIZES :

4 l

14 l

### FEATURES

- **Recoatable**: 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



CLASS 2

CLASS 2

## ● DECORTEX SMOOTH PREMIUM SILOX - BASE



### DESCRIPTION

High quality smooth coating with polysiloxanes for the protection and decoration of all kinds of concrete surfaces, exterior masonry, restoration of single-layer mortar facades, etc. Water-vapour permeable. Water-resistant and waterproof.

Product with protection against fungi and algae.

BASES: P – TR

SIZES :

4 l

14 l

### FEATURES

- **Recoatable**: 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 8-10 m<sup>2</sup>/l per coat



CLASS 2

CLASS 2

## ● CLIMAT - BASE



### DESCRIPTION

Acrylic smooth coating for decoration and protection of all kinds of exterior masonry surfaces. High hydrophobicity in early rain application together with excellent open time in warm climates.

Product with protection against fungi and algae.

BASES: P – TR

SIZES :

4 l

14 l

### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 8-10 m<sup>2</sup>/l



CLASS 3

CLASS 1

## ● DECOPUR AQUA (A+B) - BASE




### DESCRIPTION

2-component water-based enamel formulated from aliphatic polyurethane resins for the protection for metallic structures (iron, steel, galvanised steel, aluminum), concrete and cement floors, woods...

BASES: P – TR

SIZES :

Comp. A 4 kg.	Comp. A 0,8 kg.
Comp. B 1 kg.	Comp. B 0,2 kg.



### FEATURES

- **Mixture:** (A+B) 4:1 weight ratio.
- **Recoat:** 12-24 hours.
- **Thinner:** Water.
- **Coverage:** 7-10 m<sup>2</sup>/Kg. per coat



**Gloss Finish**

## ● ALBOR AQUA GLOSS - BASE



### DESCRIPTION

High quality water-based glossy enamel formulated from alkyd polyurethane resins.

BASES: P – TR

SIZES :

750 ml	4 l
--------	-----

### FEATURES

- **Recoat:** 12-24 hours
- **Thinner:** Water .
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



**Gloss Finish**

## ● ALBORLAC AQUA SATIN - BASE



### DESCRIPTION

High quality water-based satin enamel formulated from alkyd polyurethane resins.

BASES: P – TR

SIZES :

750 ml	4 l
--------	-----

### FEATURES

- **Recoat:** 6-8 hours.
- **Thinner:** Water
- **Coverage:** 12-16 m<sup>2</sup>/l .per coat



**Satin Finish**

## ● ALBORLAC AQUA MATT - BASE



### DESCRIPTION

High quality water-based matt enamel formulated from alkyd polyurethane resins.

BASES: P – TR

SIZES :

750 ml	4 l
--------	-----

### FEATURES

- **Recoat:** 6-8 hours.
- **Thinner:** Water .
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



**Matt finish**

## PRODUCT LINE 9. TINTING SYSTEM

### ● DECO-EPOXY AQUA 2 COMPONENTS (A+B) - BASE



Pot life: 60 min.

#### DESCRIPTION

2-component water-based epoxy paint.  
Hardened with polyamide, for the protection of concrete floors, metal structures, etc..

BASES: P – TR

SIZES :

Comp. A  
3 kg.


Comp. B  
0,75 kg.

Comp. A  
12 kg.

Comp. B  
3 kg.

#### FEATURES

- **Mixture (A+B):** 4:1 weight ratio.
- **Recoat:** 24 hours.
- **Walkable:** 48 hours.
- **Thinner:** Water.
- **Coverage:** 2,5-3 m<sup>2</sup>/Kg. finish.



INDOOR

Satin finish

### ● DECO-FLOORS AQUA - BASE



#### DESCRIPTION

Water-based acrylic paint with good adherence, for the protection and decoration of floors in car parks, warehouses, sports fields, etc.  
Good resistance to light traffic

BASES: P – TR

SIZES :

4 l

15 l

#### FEATURES

- **Transitable:** 48-72 h.
- **Recoat:** 6-8 hours.
- **Thinner:** Water.
- **Coverage:** 8-10 m<sup>2</sup>/l.



INDOOR / OUTDOOR

### ● DECO-EPOXY AQUA 1 COMPONENT - BASE



#### DESCRIPTION

DECO-EPOXI 1C PRE-CATALYZED, ready-to-use, water-based acrylic-epoxy hybrid technology, with performance like conventional 2C epoxy systems, quickly access of the painted surface.  
Especially for garages, commercial floors, hospital rooms, surgery rooms, restaurant kitchens, schools, pool terraces, metal structures, walls with high resistance to abrasion, etc.

BASES: P – TR

SIZES :

4 l

15 l

#### FEATURES

- **Primer:** FLOOR PRIMER AQUA
- **Recoat:** 4-6 hours.
- **Walkable:** 48-72 hours.
- **Thinner:** Water
- **Coverage:** 8 m<sup>2</sup>/l.



INDOOR / OUTDOOR

Satin Finish

## LINE 9.2. SOLVENTBORNED BASES

### ● ALBOR ANTIOXIDANT - BASE



#### DESCRIPTION

High quality alkyd resin enamel with polyurethane. Product specially designed for our tinting system.  
ANTI-RUST ENAMEL (standard UNE 48316 for high performance solvent-based anti-corrosion decorative enamels. )

BASES: P – D – TR

SIZES :

750 ml

4 l

#### FEATURES

- **Recoat:** 12-24 hours.
- **Thinner:** Synthetic and oil.
- **Coverage:** 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

Gloss , Satin and Matt finish



## PRODUCT LINE 9. TINTING SYSTEM

### ● SYNTHETIC FAST-DRYING ENAMEL - BASE



#### DESCRIPTION

Industrial fast drying enamel for machinery, metallic structures, heaters, doors and woods, furniture...

Available in one component system or two-component system with a catalyst that increases the hardness and the chemical and weather resistance.

BASES: P – TR

SIZES :

750 ml

4 l

CATALYST:

250 ml

#### FEATURES

- **Recoatable** :6-8 hours.
- **Thinner**: Universal
- **Coverage**: 12-16 m<sup>2</sup>/l per coat



INDOOR / OUTDOOR

**Gloss Finish**

**Ratio 2 components:**  
10-15% by weight of catalyst.

## I LINE 9.3. DYES

### ● UNIVERSAL DYES- DECOTINT



COLOURS	SIZE:
	1 L
DBS (Magenta)	-
DMS (Yellow for outdoor)	-
DZS (Violet)	-
DUS (Orange)	-
DNS (Red for outdoor)	-
DRS (Blue)	-
DQS (Yellow)	-
DVS (Red)	-

COLOURS	SIZE:
	1 L
DYS (Oxyd Red)	-
DKU (White)	-
DPS (Green)	-
DLS (Blue)	-
DJS (Black)	-
DTS (Oxyd Yellow)	-
DWS (Shadow)	-
DXS (Black)	-

## I LINE 9.4. Chart of Colours

### ● Chart of Colours NOVA

Colours

2024 COLOURS



### ● Chart of Colours NATUREL (NCS)

Colours

980 COLOURS  
1950 COLOURS



### ● Chart of Colours RAL

Colours

210 COLOURS



## PRODUCT LINE 10. PRODUCTS FOR SPECIFIC USES



Enlarge your product range with our special products for specific uses.

## PRODUCT LINE 10. PRODUCTS FOR SPECIFIC USES

### I LINE 10.1. SOLVENTS

#### ● SOLVENT



DESCRIPTION	SIZES :		
	1 l	5 l	20 l
1001 Universal Solvent		X	X
1002 Synthetic and oil Solvent	X	X	X
1003 Acrylic Solvent		X	X
1004 Nitro Solvent		X	X
1007 Epoxy Solvent		X	X

### I LINE 10.2. DYES

#### ● WATER BASED DYES



COLOUR	SIZES :		
	50 ml	250 ml	1 l
Ochre, Oxyd Red, Black and Brown			
Blue, Yellow, Orange, Green and Grass Green			
Bright Red			
Violet			

#### FEATURES



INDOOR / OUTDOOR  
(depending on colour)

#### ● UNIVERSAL DYES



COLOUR	SIZES :	
	125 ml	250 ml
Ochre and Black		
Red, Green, Blue, Oxyd Red, Lemon Yellow and Royal Yellow		

#### FEATURES



INDOOR / OUTDOOR  
(depending on colour)



## LINE 10.3. ANTI-STAINS

### ● ANTI-STAINS



#### DESCRIPTION

Fast-drying paint for insulate the stains

Applications: Bathroom, kitchen, bar, hotel, etc.

Colours: WHITE.


SIZES :

750 ml

4 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Acrylic.
- **Coverage**: 10-14 m<sup>2</sup>/l per coat



1-2 hours

INDOOR / OUTDOOR

### ● ANTI-STAINS AQUA



#### DESCRIPTION

Fast-drying water based paint to isolate the stains

Applications: Bathroom, kitchen, bar, hotel, etc.

Colours: WHITE.

SIZES :


750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 4-6 hours
- **Thinner**: Water.
- **Coverage**: 10-14 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

### ● WALL-FIX



#### DESCRIPTION

Odourless solvent based paint to isolate the stains.  
Fast drying. Resistant to moisture and humidity. Finishing paint.

Applications: Bathrooms, kitchens, bars, hotels, etc.

Colours: WHITE.

SIZES :


750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Diluant**: Odourless D Solvent
- **Coverage**: 10-12 m<sup>2</sup>/l per coat



30-60 min.

INDOOR / OUTDOOR

### ● WALL-FIX AQUA



#### DESCRIPTION

Odourless solvent based paint to isolate the stains.  
Fast drying. Resistant to moisture and humidity.  
Suitebla as primer and as finishing paint.

Applications: Bathrooms, kitchens, bars, hotels, etc.

Colours: WHITE.

SIZES :


750 ml

4 l

15 l

#### FEATURES

- **Recoatable** : 4-6 hours.
- **Thinner**: Water.
- **Coverage**: 6-8 m<sup>2</sup>/l.



30-60 min.

INDOOR / OUTDOOR

## LINE 10.4. CLEANERS

### DECO-CLEANING PLUS - CLEANER / DEGREASER



#### DESCRIPTION

Highly concentrated degreasing cleaner, very effective in removing all types of grease and dirt in the industrial and maritime sectors.

SIZES :

1 l

5 l

20 l

#### FEATURES

- **Thinner:** Water.

INDOOR / OUTDOOR

## LINE 10.5. DISTEMPER

### SMOOTH DISTEMPER



#### DESCRIPTION

Breathable temple paint, for interior decoration and protection of walls, formulated from a mixture of different types of carbonates of fine granulometry and great whiteness that are fixed with different tails, providing a smooth finish of great coverage and whiteness.

SIZES :

1 kg.

2 kg.

5 kg.

13 l

#### FEATURES

- **Recoatable :** 4-6 hours.
- **Thinner:** Water
- **Rendement:** 3-4 m<sup>2</sup>/Kg.



### DROPS DISTEMPER



#### DESCRIPTION

Paste in aqueous phase formulated with different types of carbonates of fine particle size and high whiteness. Especially suitable for textured finishes such as "gotele"

SIZE :

13 l

#### FEATURES

- **Thinner:** Water.
- **Rendement:** 1-2 m<sup>2</sup>/kg.



### DISTEMPER FOR EXTERIORS



#### DESCRIPTION

A distemper paint formulated from a mixture of different types of fine-grained carbonates of great whiteness and reinforced with silicates and binders that provide excellent adhesion and total water repellence, thus providing a smooth finish with great coverage and whiteness.

Smooth finish decorative and protective paint for exterior and

SIZE :

13 l

#### FEATURES

- **Recoatable :** 4-6 hours.
- **Thinner:** Water.
- **Rendement:** 3-4 m<sup>2</sup>/kg.



# PACKAGING

(UNITS PER CARTON)

	50 ml	125 ml	250 ml	750 ml	1 l	4 l	5 kg.
Dyes	24	12	12		6		
Water based paints				6		4	
Solvent based enamels and varnishes and others			8	6		2	
Primers / Decokril				6	6		
Plaste (powder or paste)			18	6	20		4
Rust converter				6			
High Decoration				6	6		

**Buckets per pallet of same volume and product:**

15 l	14 l	9 l	4 l
33 units	33 units	48 units	120 units





## GENERAL SALE CONDITIONS:



1. Our general sales conditions and all prices are EX Works our facilities INCOTERMS 2020. The goods always travel at the risk and peril of the buyer, even if they are sent carriage paid.
2. As per previous point, the risk of all shipment corresponds to the customer/consignee.
3. All purchase orders must be optimized to the previously indicated packaging per carton.
4. All complaints must be made within five days of receipt of the goods.
5. In all cases, the liability of PINTURAS DECOLOR will always be limited to the value of the sold goods.
6. Any return of goods must be justified and approved by PINTURAS DECOLOR. No merchandise will be accepted without our authorization..
7. No returns of tinted paints tinted with the tinting system will be accepted.
8. All prices are in EURO € currency.
9. For expressly authorised returns whose causes are not attributable to PINTURAS DECOLOR, a reduction of 20% of the amount will be applied to cover management, transport and handling costs..
10. In the event of a dispute, both parties will be subject to the jurisdiction of the Courts of La Roda. Expressly waiving their own jurisdiction.
11. In accordance with the Packaging Act 11/1997 and article 18.1 of the regulations, the person responsible for the delivery of used packaging, for the correct management of the environment requirements, will be the final holder of the packaging.



PINTURAS  
**DECOLOR®**

[www.decolor.com](http://www.decolor.com)

**PINTURAS DECOLOR, S.L.**

Pol. Ind. El Salvador  
Avda. 3ª, Parcelas 4 y 5  
Tel. +34 967 44 17 14  
Fax. +34 967 44 33 54  
02630 LA RODA (Albacete)  
SPAIN  
[decolor@decolor.com](mailto:decolor@decolor.com)